# HITACHI
# SERVICE MANUAL

YK | No.0357E

PAL/SECAM/NTSC

## G9PL Chassis

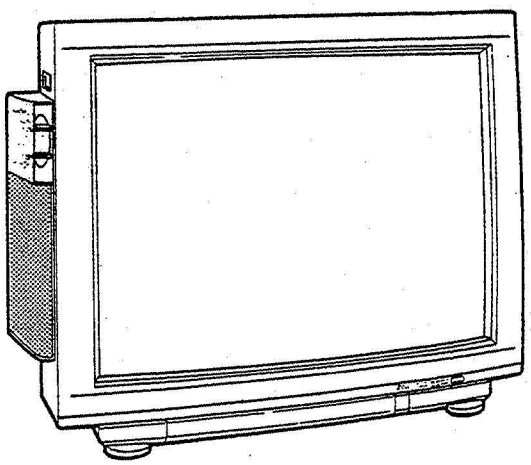

CONTENTS


SEFETY PRECAUTIONS ..... 2
PRODUCT SAFETY NOTICE ..... 2
MAIN FEATURES ..... 2
CONTROLS ..... 3
REMOTE CONTROL UNIT ..... 4
BASIC CIRCUIT DIAGRAM ..... 5
PRINTED WIRING BOARD ..... 17
REPLACEMENT PARTS LIST ..... 23


**CAUTION:** Before servicing this chassis, it is important that the service technician read the "Safety Precaution" and "Product Safety Notices" in this Service Manual.

### TECHNICAL SPECIFICATIONS

| | | |
|---|---|---|
| Reception system ..... | 625lines | B.G/I/D.K/H PAL<br>B.G/D.K/K'/SECAM<br>NTSC50. |
| | 525-lines | M/NTSC, NTSC3.58<br>NTSC4.43-5.5/6.0/6.5<br>PAL60. |
| Channel coverage ..... | CCIR | :E2∿12, E21∿69,<br>01∿3, S1∿10, S11∿20. |
| | OIRT | :R1∿12, R21∿69. |
| | JAPAN | :J1∿12, J13∿62. |
| | U.S.A. | :US2∿13, J∿W, US14∿69. |
| | Hong Kong, U.K. | : UK21∿69. |
| | China | : C1∿12, C13∿57. |
| Aerial input ..... | 75 ohm unbalanced. | |

| | |
|---|---|
| Colour picture tube .... | CMT2518: A59JVQ60X (C)<br>CMT2718: A64JVQ60X (C)<br>CMT2918: A68KFS60X (C) |
| Speakers ..... | 6 cm x 4 cm x 2, 10 cm dia. x 2 |
| Sound output ..... | Max. 10W x 2 |
| Power supply ..... | AC 110V/220V<br>(Usable range: 100∿280V) 50/60 Hz |
| Power consumption..... | CMT2518: 126W<br>CMT2718: 129W<br>CMT2918: 139W |
| Dimensions ..... (W x H x D) | CMT2518: 67.8 x 51.1 x 46.0 cm<br>CMT2718: 72.0 x 55.0 x 49.5 cm<br>CMT2918: 75.0 x 57.5 x 49.5 cm |
| Weight ..... | CMT2518: 31.0 kg<br>CMT2718: 37.0 kg<br>CMT2918: 42.0 kg |

* Specifications are subject to change without notice to improve perfomance.

SPECIFICATIONS AND PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT

## SOLID STATE COLOR TELEVISION


**September 1990** **YOKOHAMA WORKS**

## SAFETY PRECAUTIONS

**WARNING:** Since the chassis of this receiver is connected to one side of the Mains Supply during operation, service should not be attempted by anyone unfamiliar with the precautions necessary when working on this type of equipment. The following precautions should be observed.

1. Do not install, remove, or handle the picture tube in any manner unless shatter-proof goggles are worn. People not so equipped should be kept away while picture tubes are handled. Keep picture tube away from the body while handling.
2. When replacing chassis in the cabinet, all the protective devices are put back in place, such as; barriers, non-metallic knobs, adjustment and compartment cover or shields, isolation resistor-capacitor, etc.
3. When service is required, observe the original lead dress. Extra precaution should be taken to assure correct lead dress in the high voltage circuitry area.
4. Always use the manufacture'rs replacement component. Especially critical components as indicated on the circuit diagram should not be replaced by other makes.
   Furthermore where a short circuit has occurred, replace those components that indicate evidence of overheating.
5. Before returning a serviced receiver to the customer, the service technician must throughtly test the unit to be certain that it is completely safe to operate without danger of electrical shock, and be sure that no protective device built into the instrument by the manufacturer has become defective, or inadvertenly defeated during servicing.
   Therefore, the following checks are recommended for the continued protection of the customers and service technicians.

## INSULATION

Insulation resistance should not be less than 7MΩ at 500V DC between the mains poles and any accessible metal parts. Also, No flashover or breakdown should occur during the dielectric strength test, to apply 4KV AC for one minute between the mains poles and any accessible metal parts.

## X-RADIATION

**TUBES:** The primary source of X radiation in this receiver is the picture tube. The tube utilized for the above mentioned function in this chassis is specially constructed to limit X radiation.
For continued X radiation protection, the replacement tube must be the same type as the original, HITACHI approved type.

## PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in HITACHI television reciever have special safety related characteristics. These characteristics are often not evident from visual inspection nor can be protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this Service Manual. Electrical components having such features are identified by marking with a ⚠ on the schematics and on the replacement parts list in this Service Manual.
The use of a substitute replacement component which does not have the same safety characteristics as the HITACHI recommended replacement one shown in the parts list in this Service Manual, may create electrical shock, fire, X radiation, or other hazards.
Product Safety is continuously under review and new instructions are issued from time to time. For the latest information, always consult the current HITACHI Service Manual. A subscription to, or additional copies of, HITACHI Service Manual may be obtained at a nominal charge from your HITACHI SALES CORPORATION.

---

## MAIN FEATURES

1. Auto programming system.
2. A/V input terminals (2 systems), A/V output terminals, S input terminals (PAL, NTSC)
3. Off-timer function.
4. Various on-screen display.
5. Dynamic noise reduction.

## CONTROLS

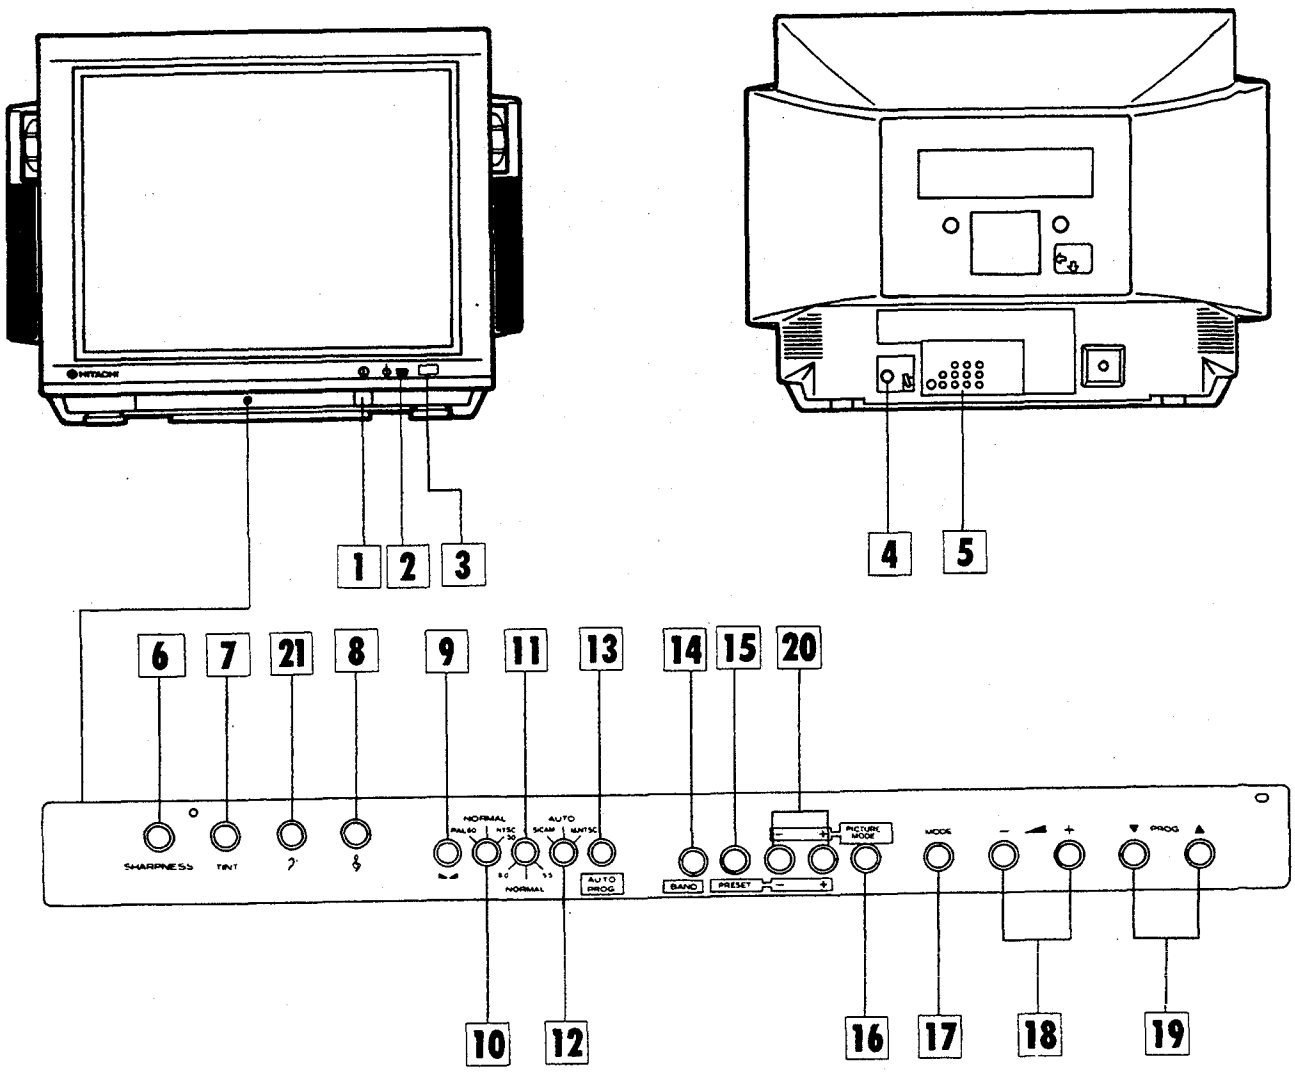


1 Power ON/OFF switch

2 Stand-by indicator

3 Remote control light receiver

4 Aerial input terminal

5 AV IN/OUT terminals

6 Sharpness control

7 Tint control

8 Treble control

9 Balance control

10 PAL60/NTSC50 switch

11 NICAM interfence switch (NTSC3.58-5.5/6.0 switch)

12 System switch

13 Auto programme button

14 Band select button

15 Preset button

16 Picture mode button

17 Mode button

18 Volume UP/DOWN button

19 Programme UP/DOWN button

20 UP/DOWN buttons (For picture control, search)

21 Bass control

Note: "AV" position (positions 29, 0) is provided for the convenience of VTR playback.
"AV" 0 position ..... PAL 60
"AV" 29 position ..... Others

## REMOTE CONTROL UNIT

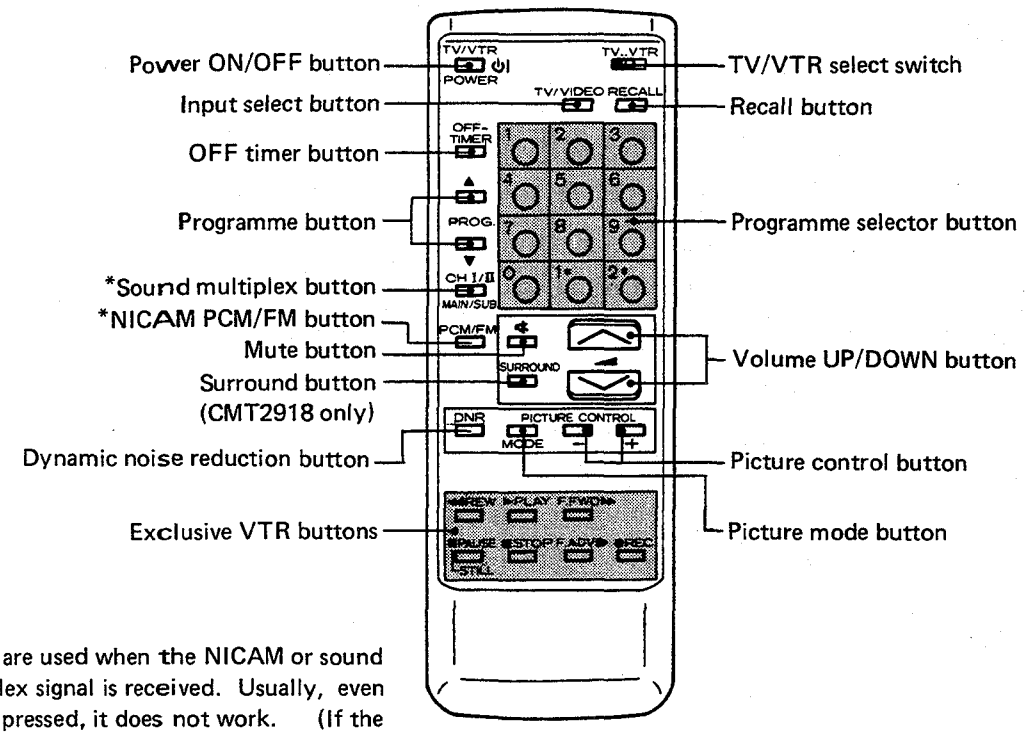


These are used when the NICAM or sound multplex signal is received. Usually, even if it is pressed, it does not work. (If the NICAM or sound multplex adapter is not attached, this cannot be used. Contact your dealer for details.)

## REMOTE CONTROL CIRCUIT DIAGRAM

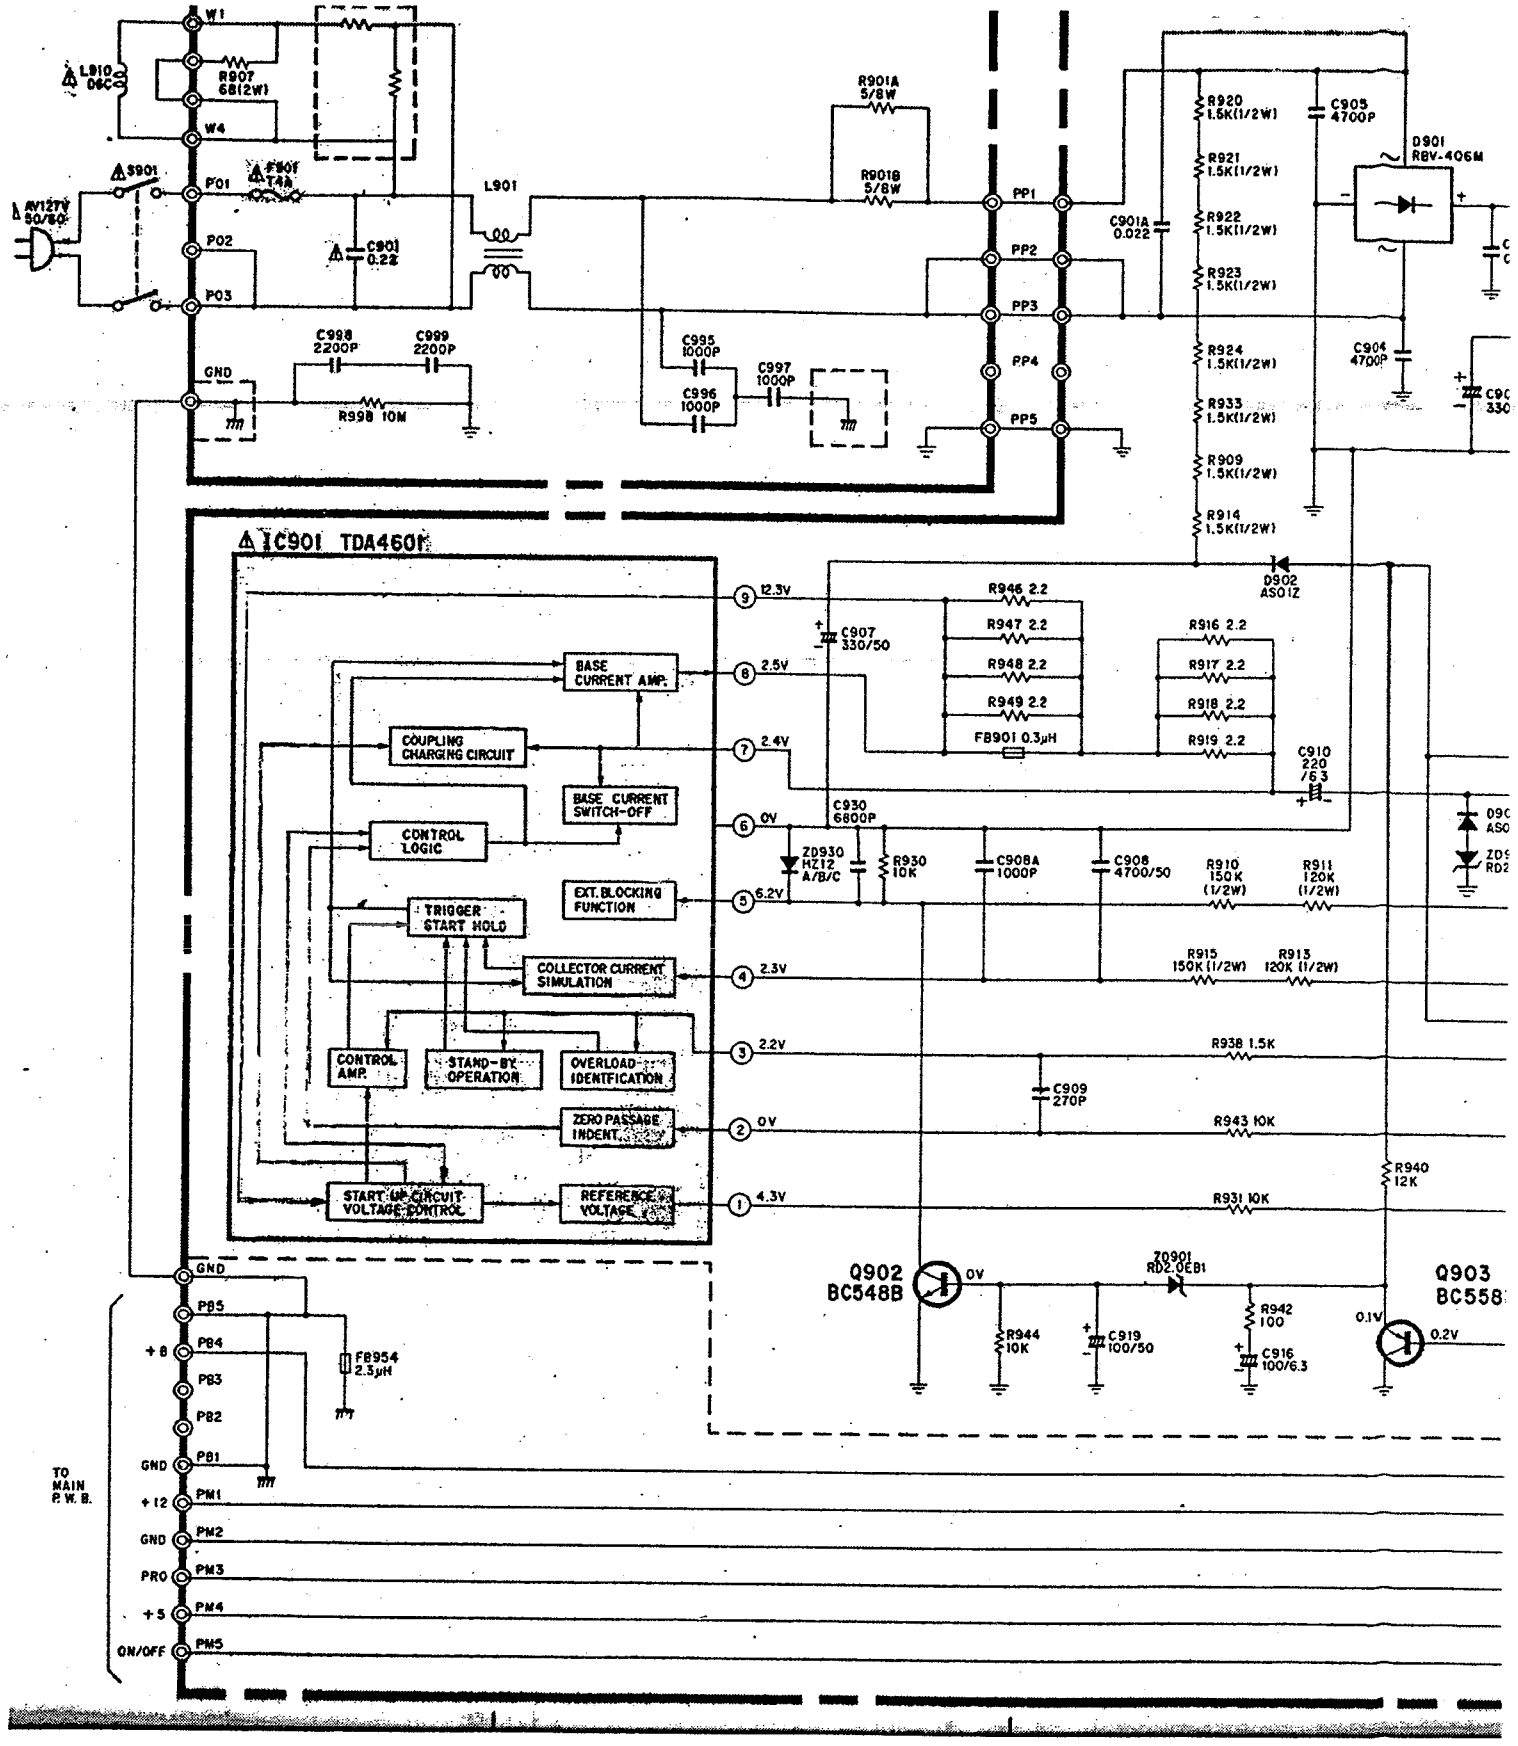
W1
W4
R907 68(2W)
L910 06C
S901
F901 T4A
AV127V 50/60
P01
P02
P03
C901 0.22
L901
R901A 5/8W
R901B 5/8W
PP1
PP2
PP3
PP4
PP5
C901A 0.022
R920 1.5K(1/2W)
R921 1.5K(1/2W)
R922 1.5K(1/2W)
R923 1.5K(1/2W)
R924 1.5K(1/2W)
R933 1.5K(1/2W)
R909 1.5K(1/2W)
R914 1.5K(1/2W)
C905 4700P
D901 RBV-406M
C904 4700P
C998 2200P
C999 2200P
R998 10M
C995 1000P
C996 1000P
C997 1000P
GND
IC901 TDA4601
BASE CURRENT AMP.
COUPLING CHARGING CIRCUIT
BASE CURRENT SWITCH-OFF
CONTROL LOGIC
EXT. BLOCKING FUNCTION
TRIGGER START HOLD
COLLECTOR CURRENT SIMULATION
CONTROL AMP.
STAND-BY OPERATION
OVERLOAD IDENTFICATION
ZERO PASSAGE INDENT.
START UP CIRCUIT VOLTAGE CONTROL
REFERENCE VOLTAGE
9 12.3V
8 2.5V
7 2.4V
6 0V
5 6.2V
4 2.3V
3 2.2V
2 0V
1 4.3V
C907 330/50
R946 2.2
R947 2.2
R948 2.2
R949 2.2
FB901 0.3µH
R916 2.2
R917 2.2
R918 2.2
R919 2.2
D902 AS01Z
C910 220 /63
C930 6800P
ZD930 HZ12 A/B/C
R930 10K
C908A 1000P
C908 4700/50
R910 150K (1/2W)
R911 120K (1/2W)
R915 150K (1/2W)
R913 120K (1/2W)
R938 1.5K
C909 270P
R943 10K
R940 12K
R931 10K
Q902 BC548B
Q903 BC558
ZD901 RD2.0EB1
R944 10K
C919 100/50
R942 100
C916 100/6.3
0.1V
0.2V
FB954 2.3µH
TO MAIN P.W.B.
P85
P84
P83
P82
P81
PM1
PM2
PM3
PM4
PM5
+8
GND
+12
GND
PRO
+5
ON/OFF

## IF CIRCUIT DIAGRAM

### IF P.W.B. (IF SECTION)

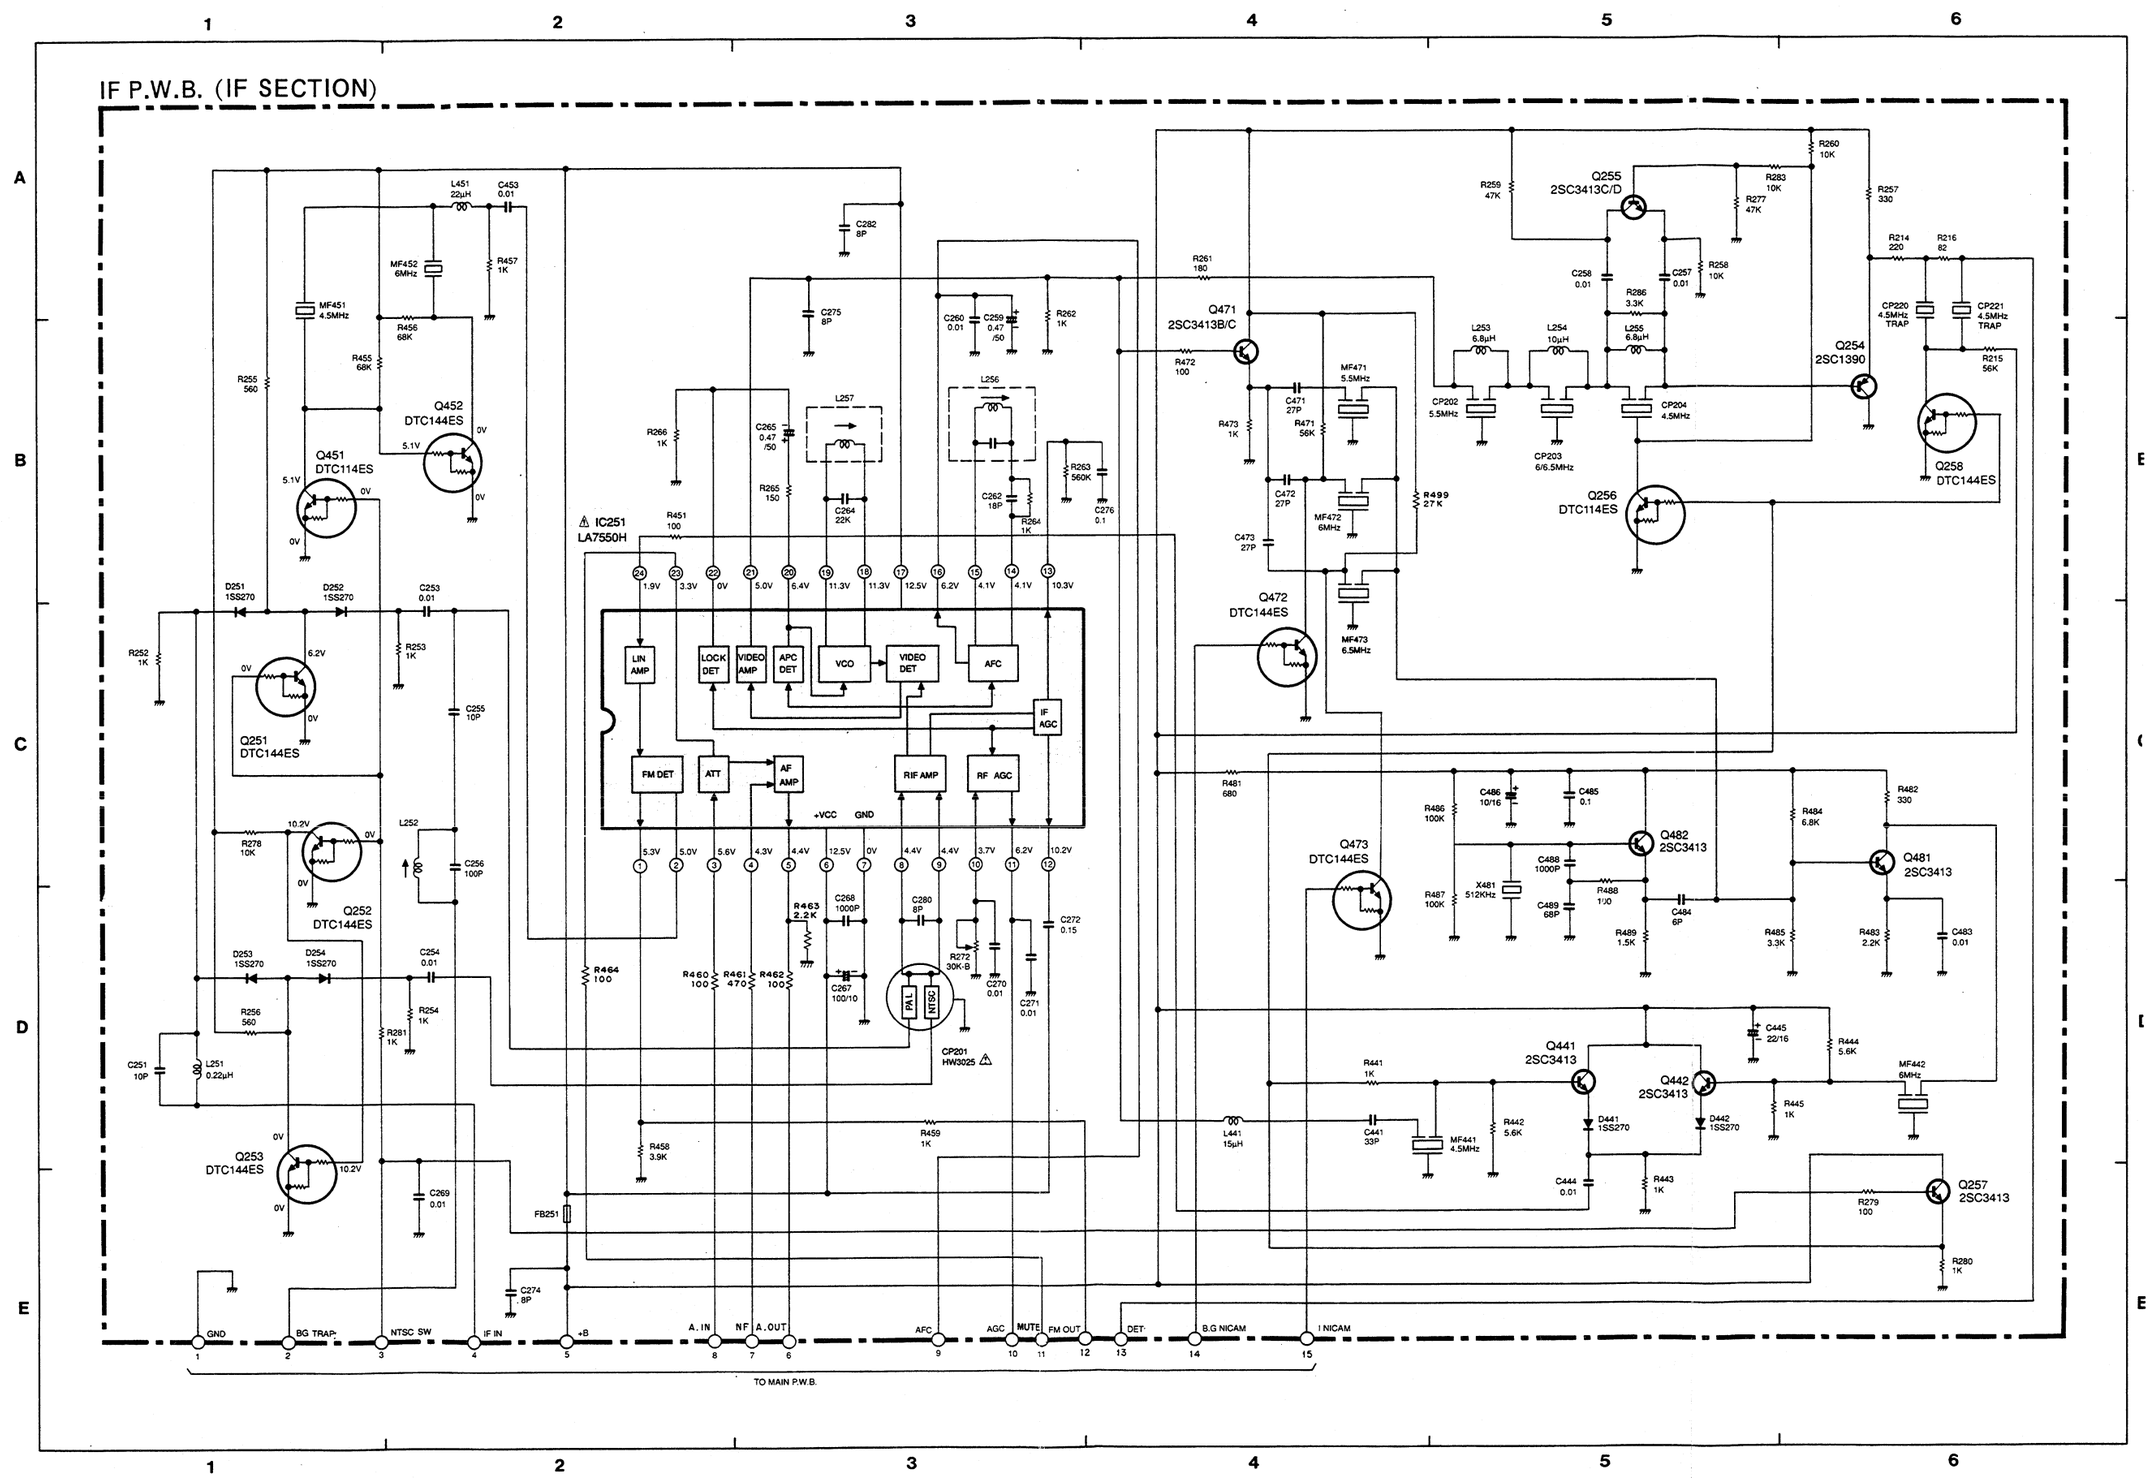

## SECAM CIRCUIT DIAGRAM

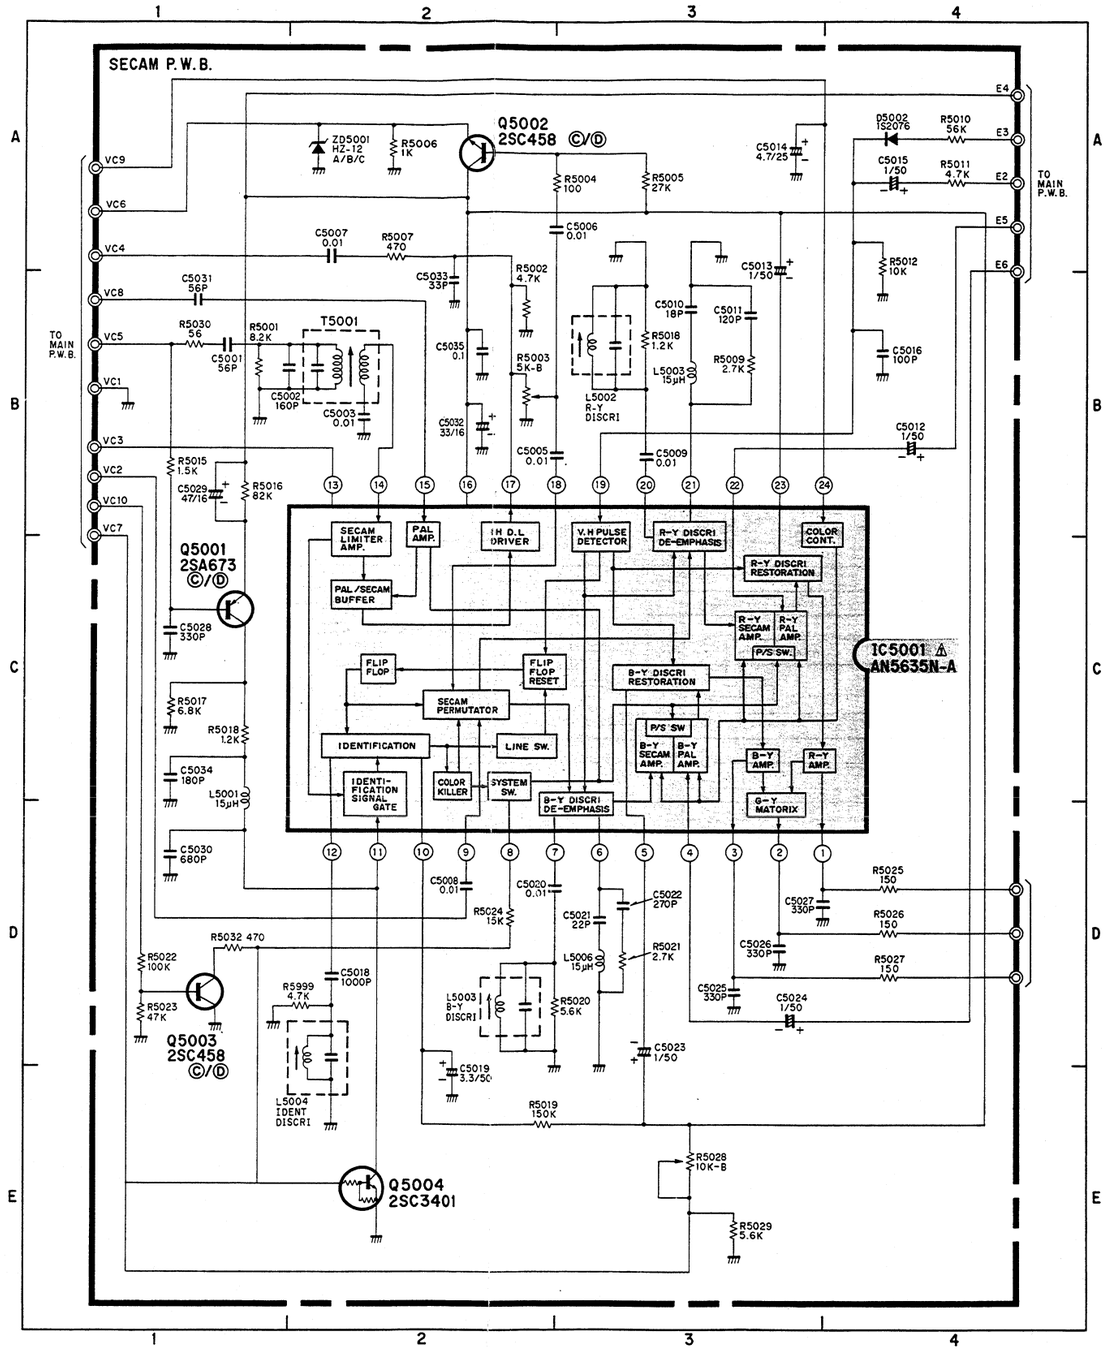

# BASIC CIRCUIT DIAGRAM (1/2)

MAIN P.W.B. 1/2

TO IF P.W.B.

TO CPT P.W.B.

TO SOUND MULTI (ADAPTABLE)

ANT.
AGC
VT
AFC
BM
IF
BL
BH
BU

⚠ U001 ET-575S

CP050 77MHz

⚠ CP001 IF AMP

⚠ IC1102 LA7910

⚠ CP051

VOL
TRE
BAL
BASS
+12
GND
(R)
(L)
+111V
GND
GND
+12V
GND
PROTECT

TO SOUND OUTPUT P.W.B.

TO POWER SUPPLY P.W.B.

NTSC 50
PAL 60
SECAM
3.58 NTSC

L1103 100μH

Q4401~Q4405 2SC3413 Ⓒ/Ⓓ x5

⚠ CP1101 SPS409

AMP.
LIMITER LEVEL SHIFT
BIAS
AUTO BIAS LEVEL CONTROL
PEAK DETECTOR
WAVE SHAPING

CMT2918 ONLY

Q1101 2SC458 Ⓒ/Ⓓ
Q1102 PST529C
Q1103 DTC114ES
Q1104 2SC3413 Ⓒ/Ⓓ
Q1105 2SC3413 Ⓒ/Ⓓ
Q1106 2SC3413 Ⓒ/Ⓓ
Q1107 2SC3413 Ⓒ/Ⓓ
Q1110 2SC3413
Q1111 2SC3413 Ⓒ/Ⓓ
Q1112 2SC3413 Ⓒ/Ⓓ
Q1113 DTC124ES
Q1114 2SC3413 Ⓒ/Ⓓ
Q1115 2SC3413 Ⓒ/Ⓓ
Q1117 2SC3413 Ⓒ/Ⓓ
Q201 DTC144ES
Q401 2SC3413 Ⓒ/Ⓓ
Q4401
Q4402
Q4403
Q4404
Q4405

IC1103 LA9710

⚠ IC1101 M34300N4-657SP

POWER
CONT-ROLLER CHARACTOR OUTPUT
SKEW SW.
KEY SCAN
RESET
AFS IN
S/NC IN
VOL
BRIGHT
CONTRAST
COLOR
REMOCON IN
SURROUND ON/OFF
PCM/FM SW.
BAND SW.
TUNING
CPU
OSC FOR CHARACTOR
CHARACTOR POSITION CONTROL
TV/VIDEO SW.
OSC
CH I/II
AFT
NTSC 4.43SW
L/OTHER SW
KEY SCAN
KEY PETERN

S1101 UP DN. PROG. UP DN. VOL. TV/VIDEO
S1102 PIC + − BAND PRESET AUTO

D1101 D1108 D1109 D1110 D1111 D1112 D1113 D1114 D1115 1SS270TA D1116 D1117 D1120 D1121 D1130 D1132 D1133 D1134 D1135 D1137 D1138 D1139 D201 1SS270 D202 1SS270 (D1118)

ZD1101 ZD1104 ZD1105 ZD1102 HZS9A2 ZD1103 HZT-33 ZD1104 HZS6C2 ZD1107 HZS11A2 ZD1120 HZS5C1

X1101 3.5-4.0Vp-p 0.25μS

2.0Vp-p

# BASIC CIRCUIT DIAGRAM (1/2)

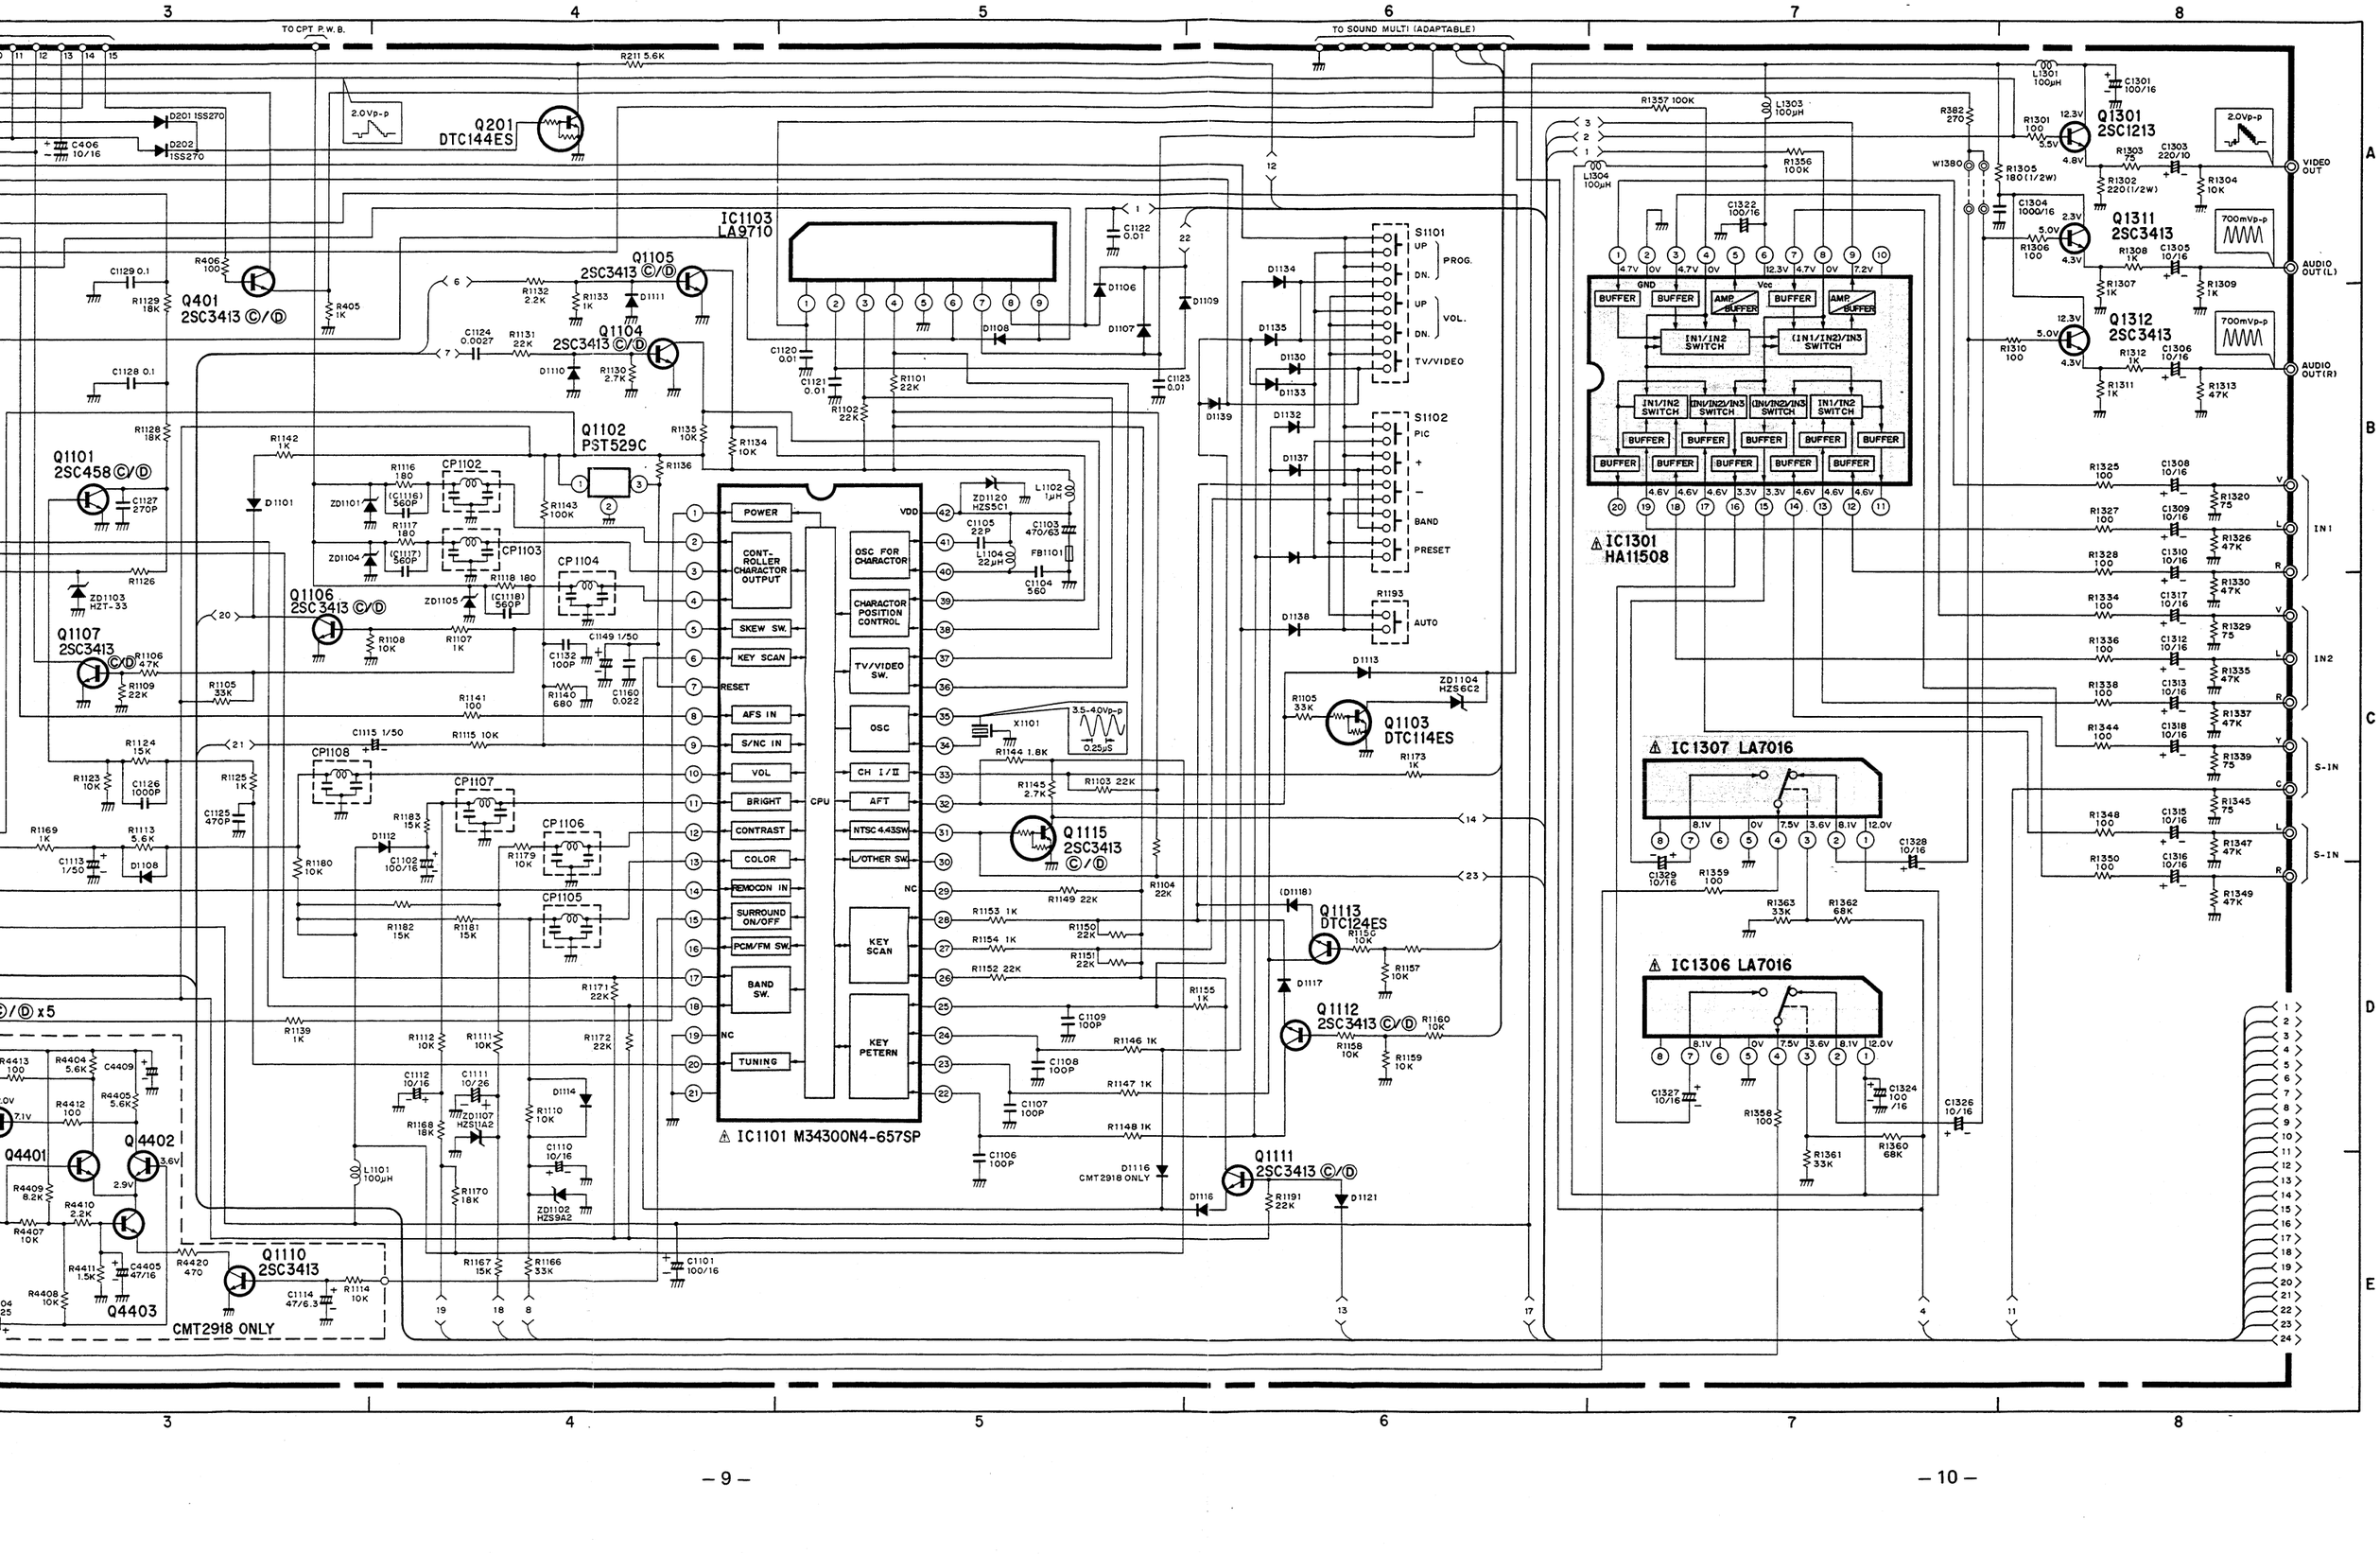

# BASIC CIRCUIT DIAGRAM (2/2)

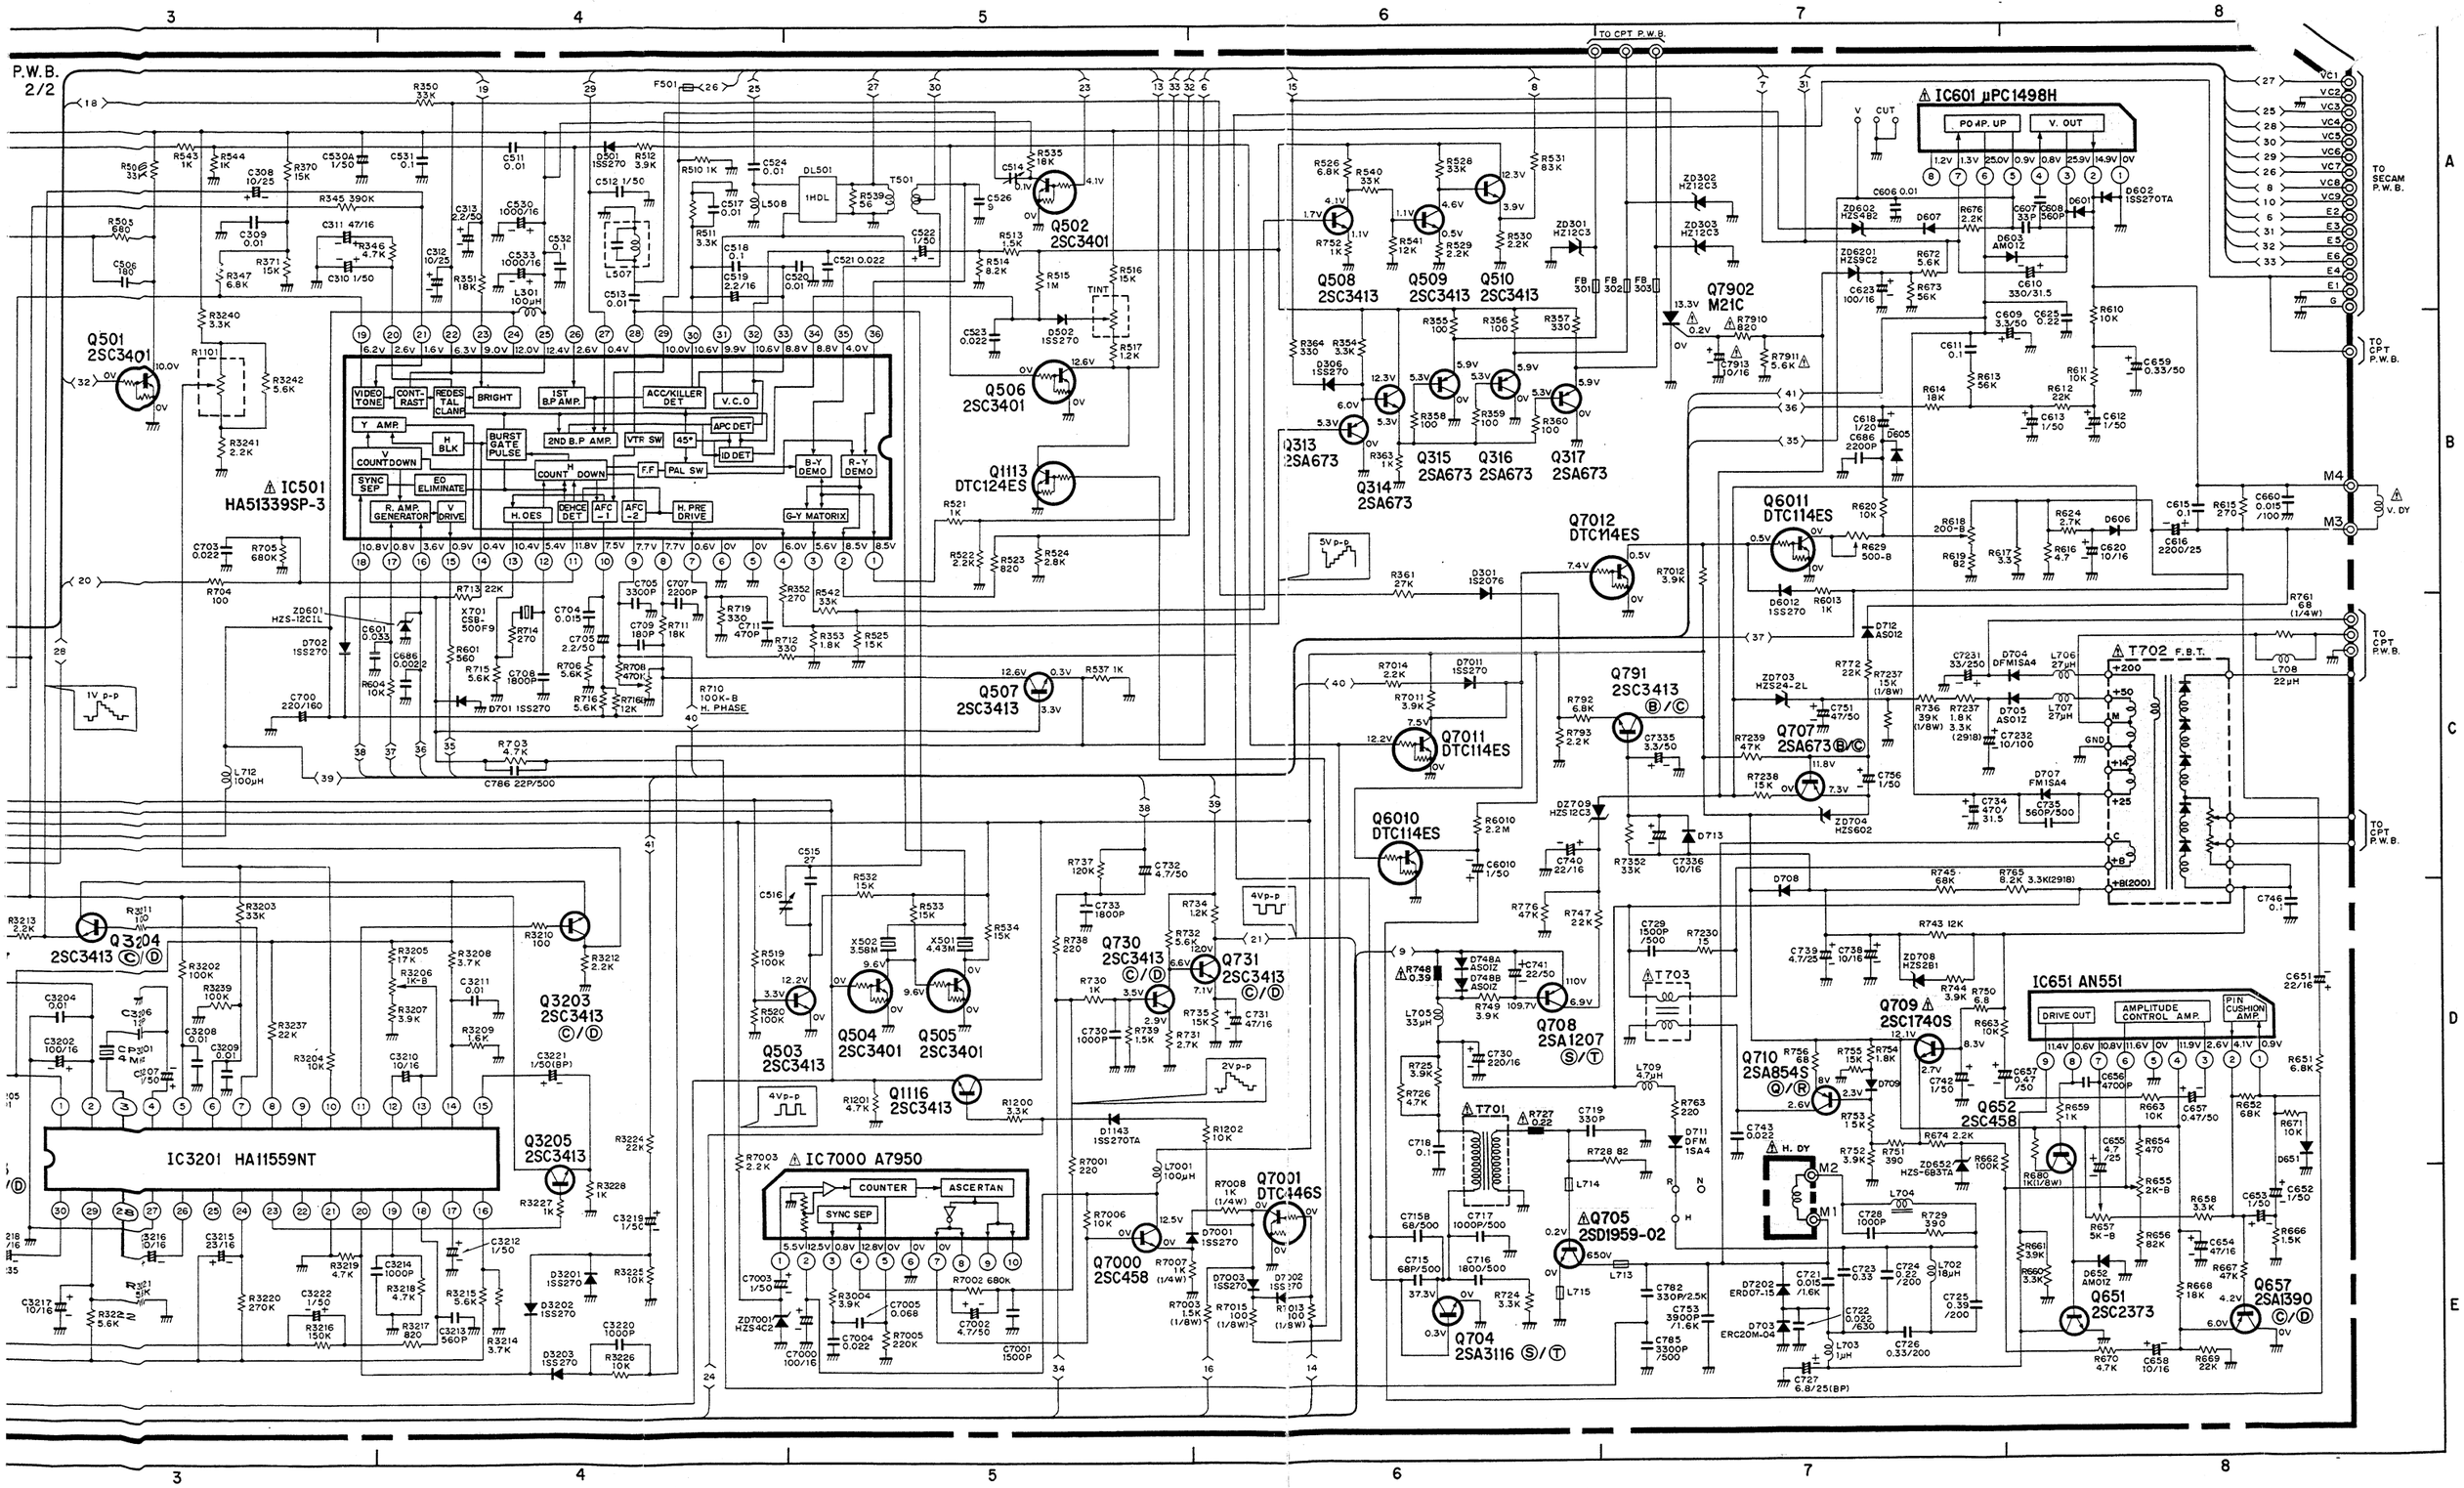

# BASIC CIRCUIT DIAGRAM (2/2)

MAIN P.W.B. 2/2

IC1305 LA7016 · IC1304 LA7018 · IC502 LA7016 · IC1302 LA7016 · IC3501 MS1386L · IC1303 LA7016 · IC501 HA51339SP-3 · IC3201 HA11559NT · IC7000 A7950

Q501 2SC3401 · Q502 2SC3401 · Q503 2SC3413 · Q504 2SC3401 · Q505 2SC3401 · Q506 2SC3401 · Q507 2SC3413 · Q508 2SC3413 · Q509 2SC3413 · Q6010 DTC114ES · Q1113 DTC124ES · Q1116 2SC3413 · Q1310 2SC3401 · Q1313 2SC3413 · Q1314 2SC673 · Q1315 2SC3413 · Q1316 2SC1314 · Q301 2SC3413 · Q302 2SC3413 · Q303 2SC3401 · Q304 2SC3401 · Q311 2SC458 · Q313 2SA673 · Q314 2SA673 · Q315 2SA673 · Q3201 2SD882 (Q/P) · Q3202 2SC3413 (C/D) · Q3203 2SC3413 (C/D) · Q3204 2SC3413 (C/D) · Q3205 2SC3413 · Q730 2SC3413 (C/D) · Q731 2SC3413 (C/D) · Q7000 2SC458 · Q7001 DTC446S

S I · DET OUT · V1/V2 S SW17 · RF I · H. BLK · V. BLK · COLOR · 110V · FORCED SECAM · S-C · M I · OSD POS SW · NTSC 4.43 · NTSC · NTSC · +12V · FORCED M · CONTRAST · AV · RF I · NTSC 4.43 I

# POWER SUPPLY SOUND OUTPUT CIRCUIT DIAGRAM

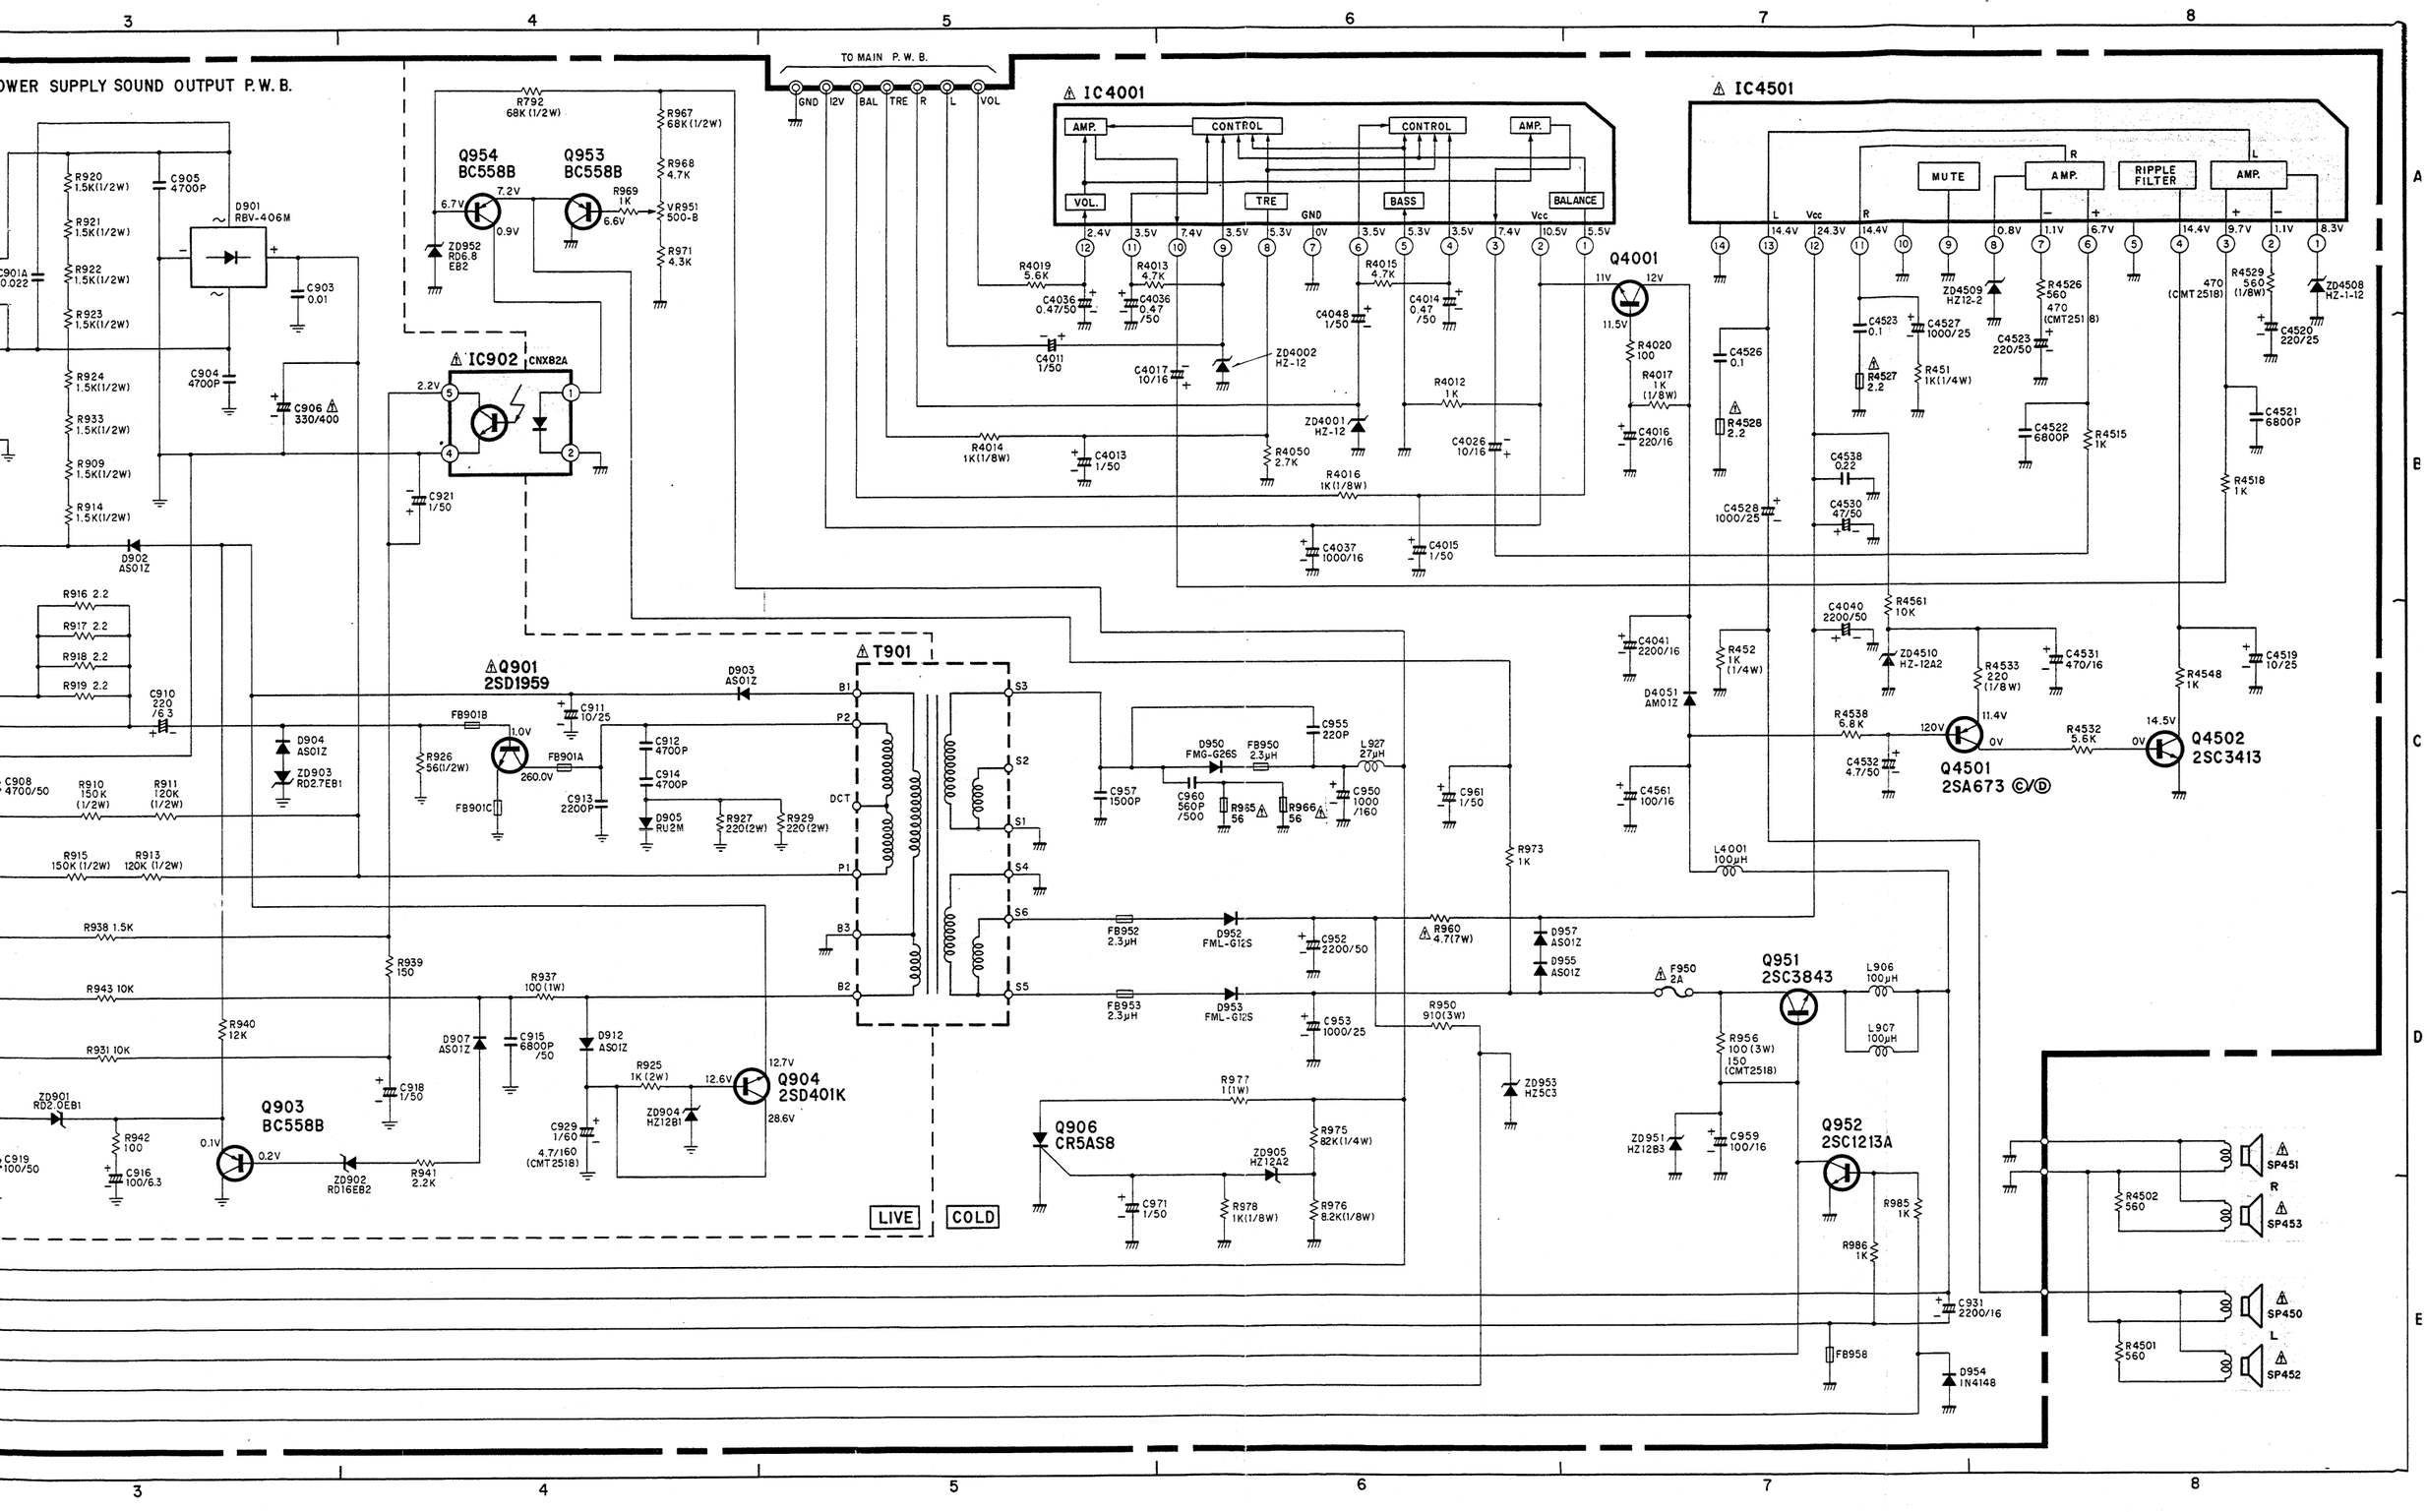

## MAIN P. W. BOARD

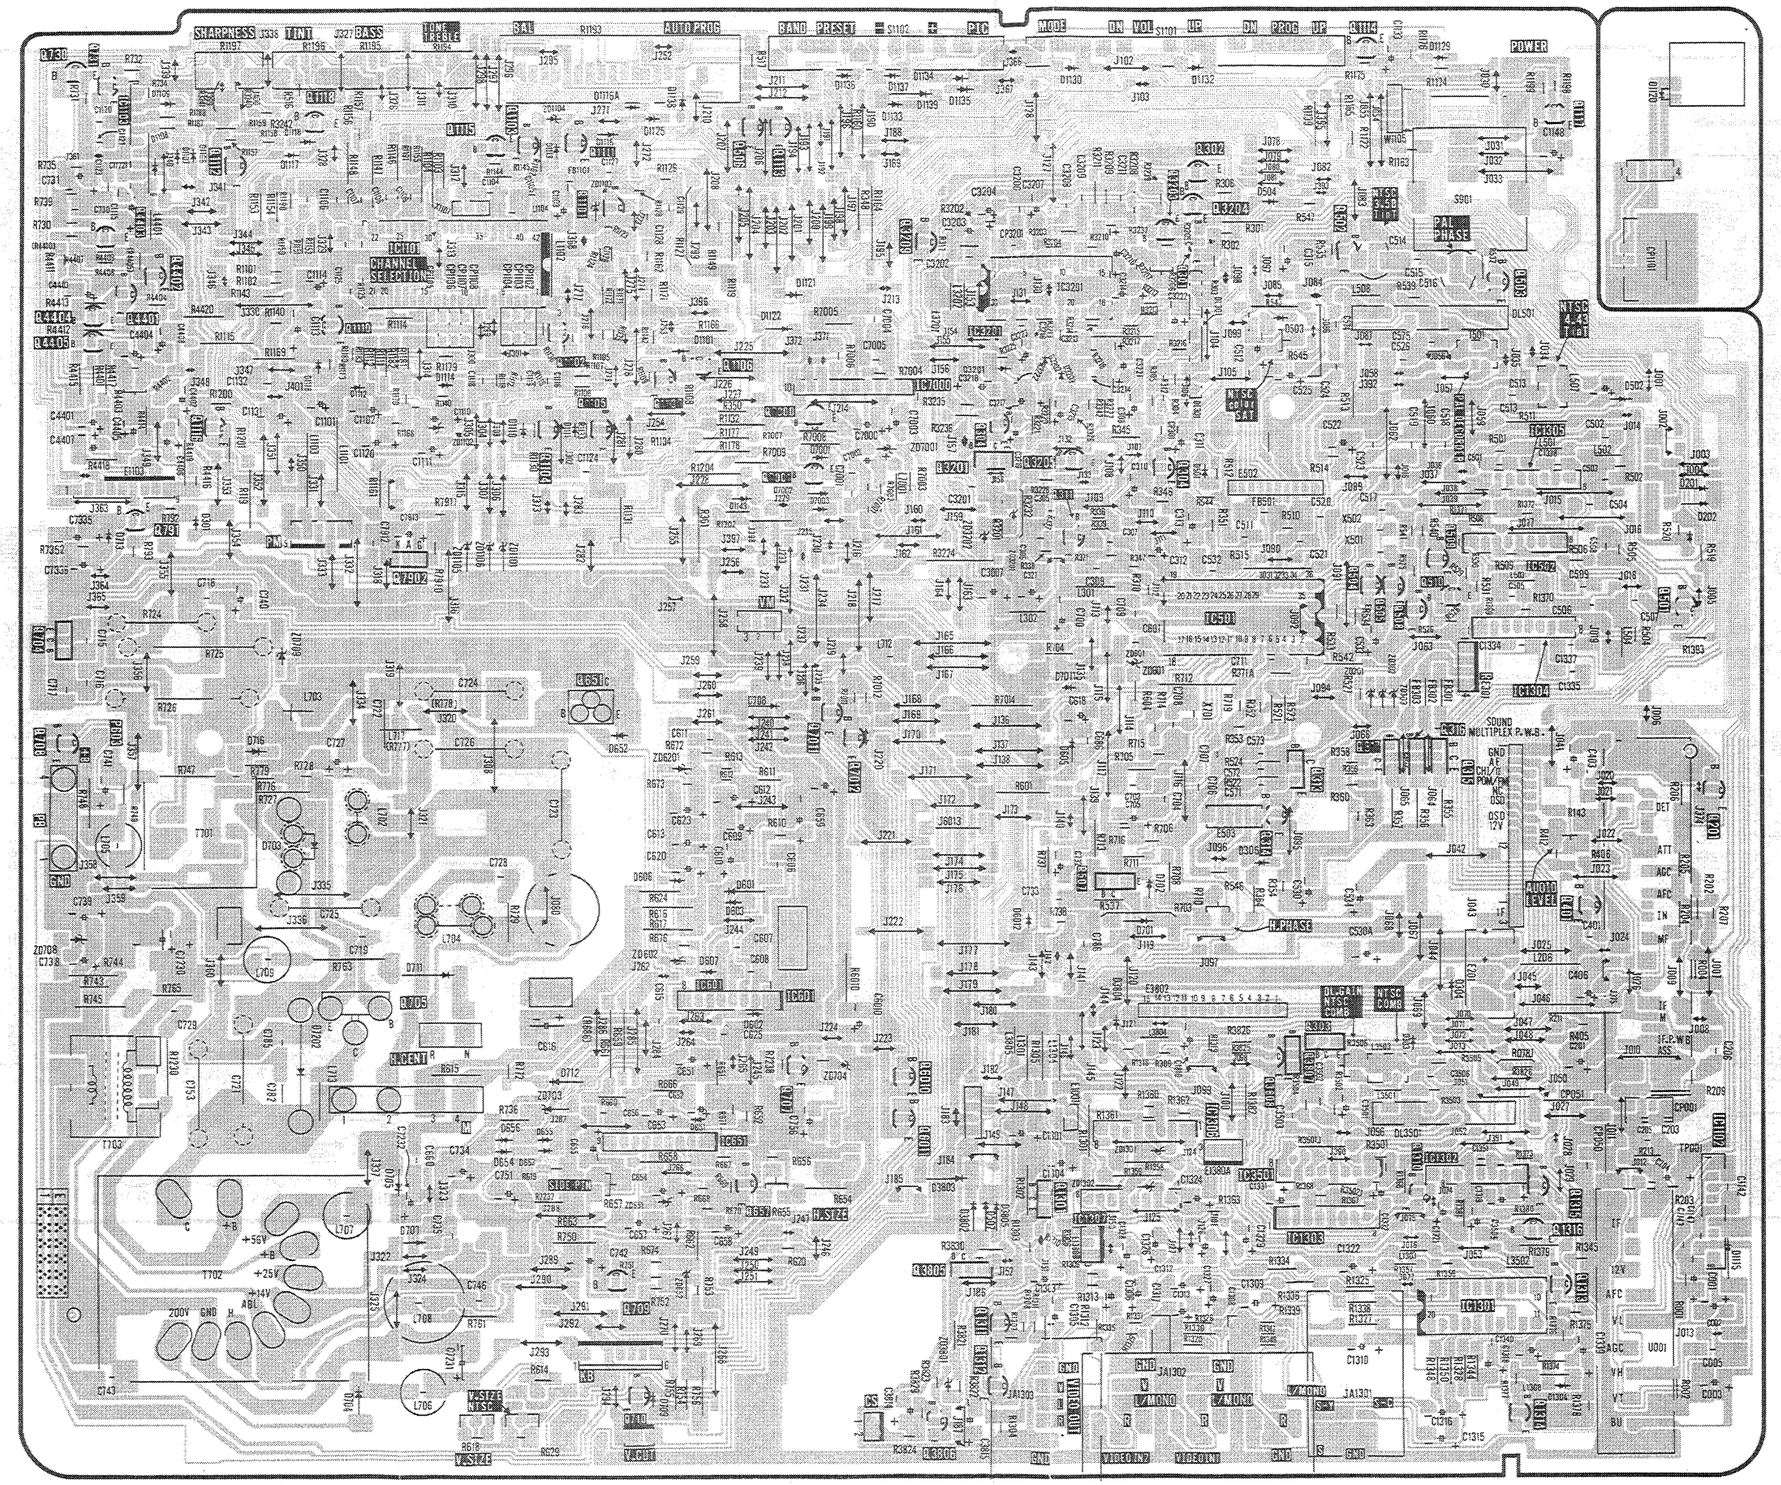

## POWER SUPPLY SOUND OUTPUT P. W. BOARD

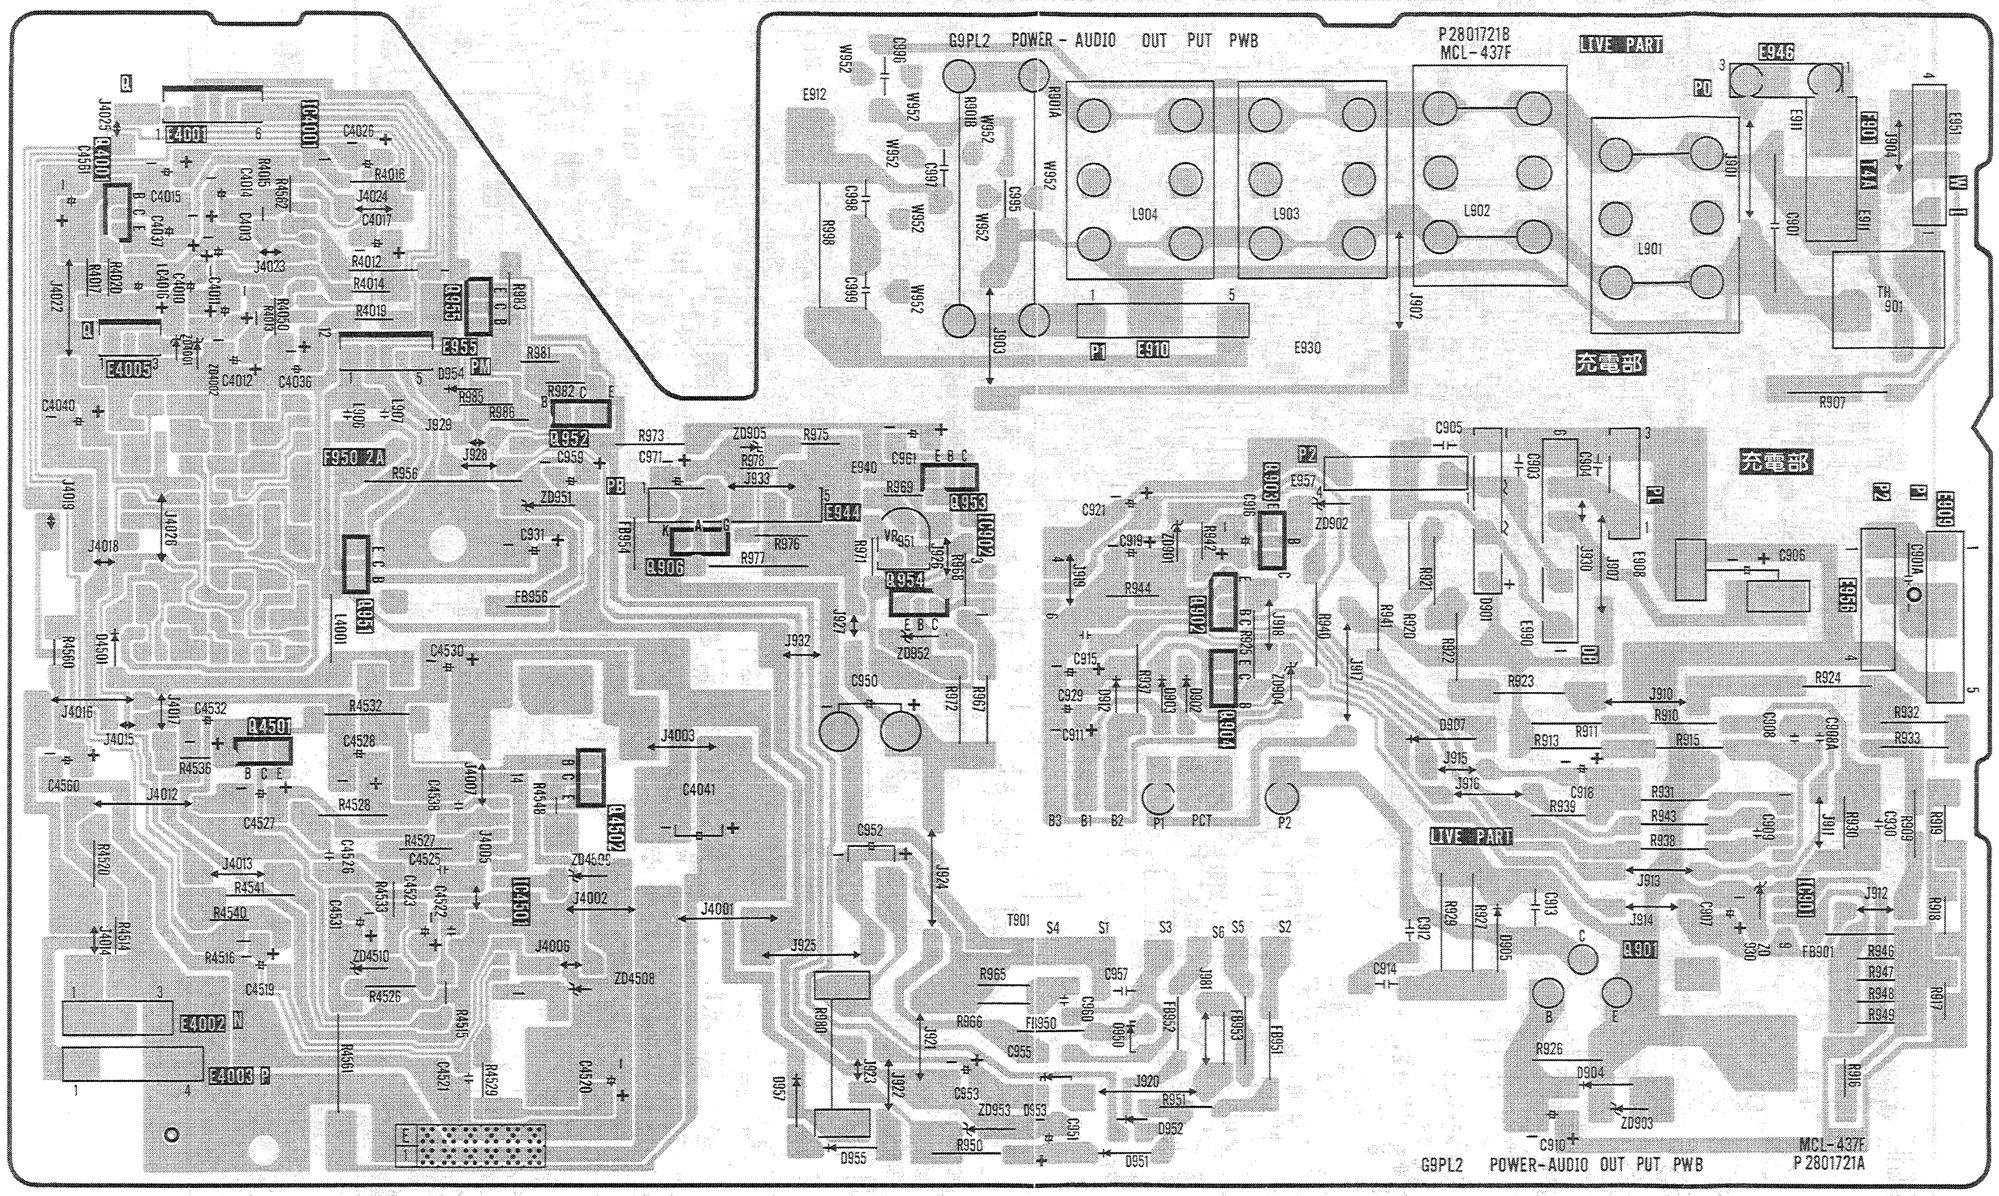

## SECAM P. W. BOARD

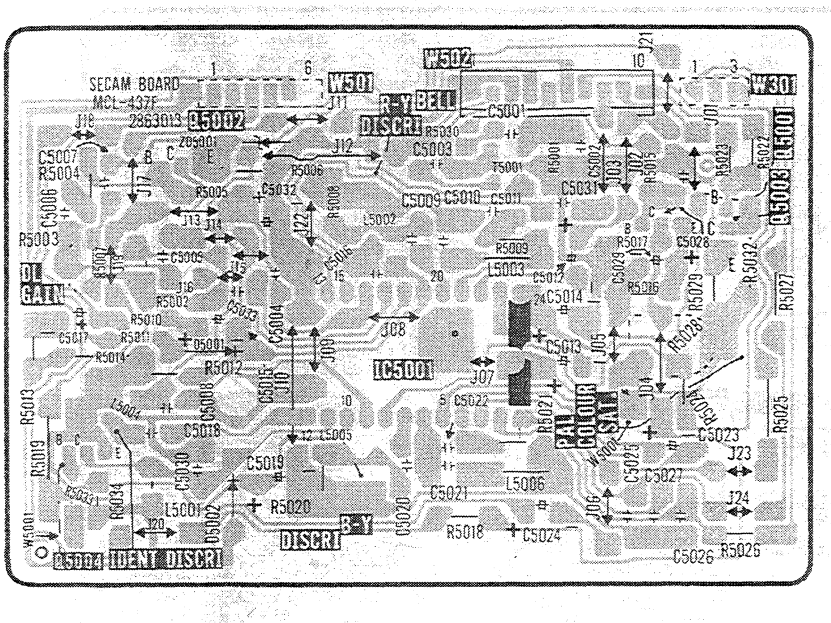


## IF P. W. BOARD

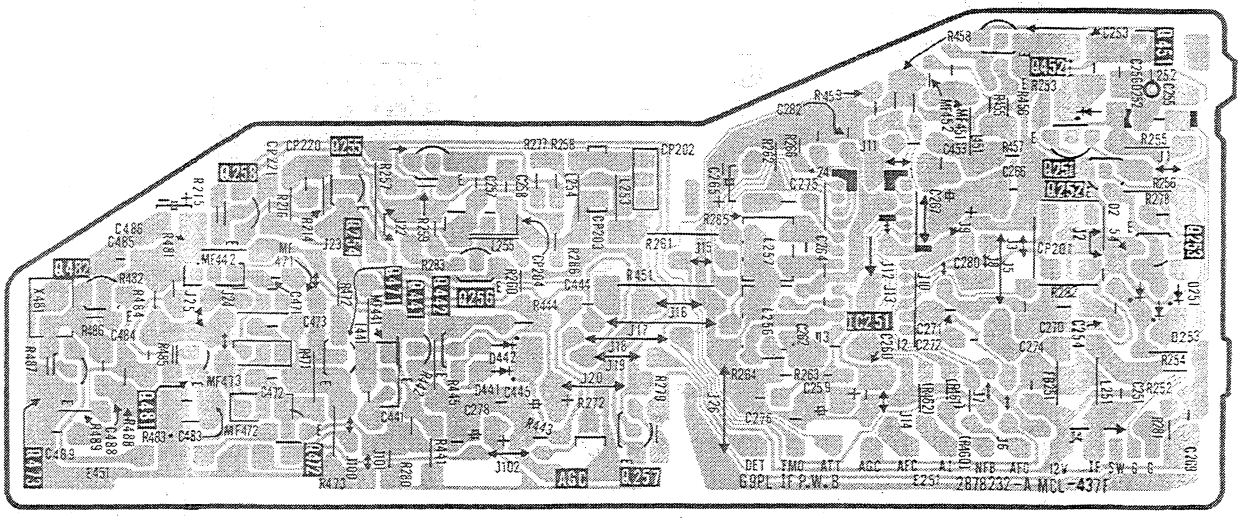

## CPT P. W. BOARD

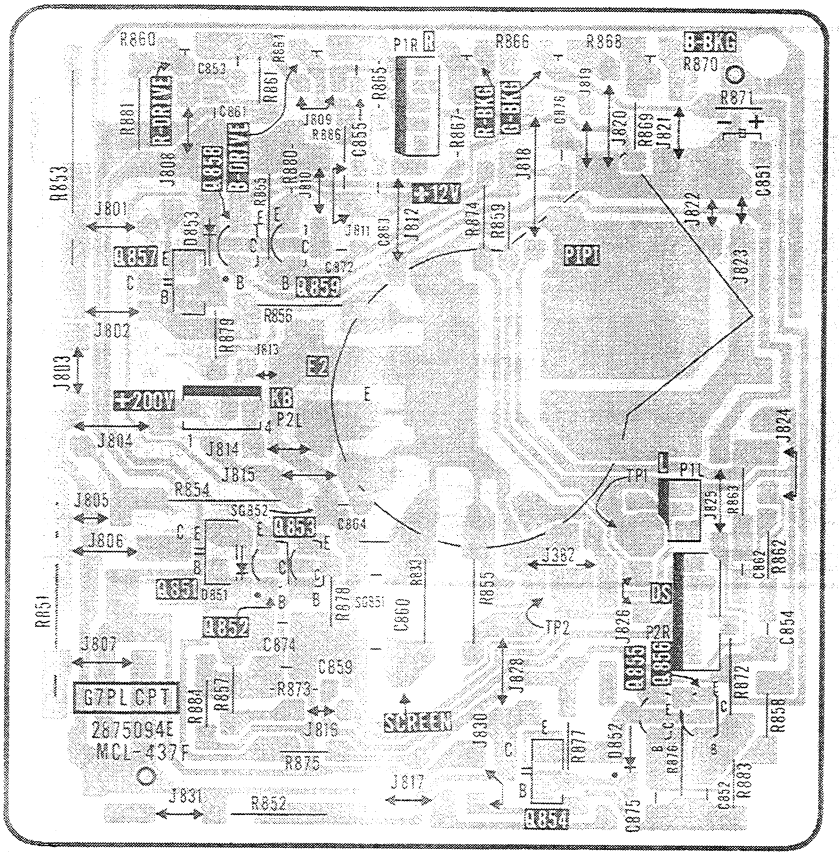


## CPT CIRCUIT DIAGRAM

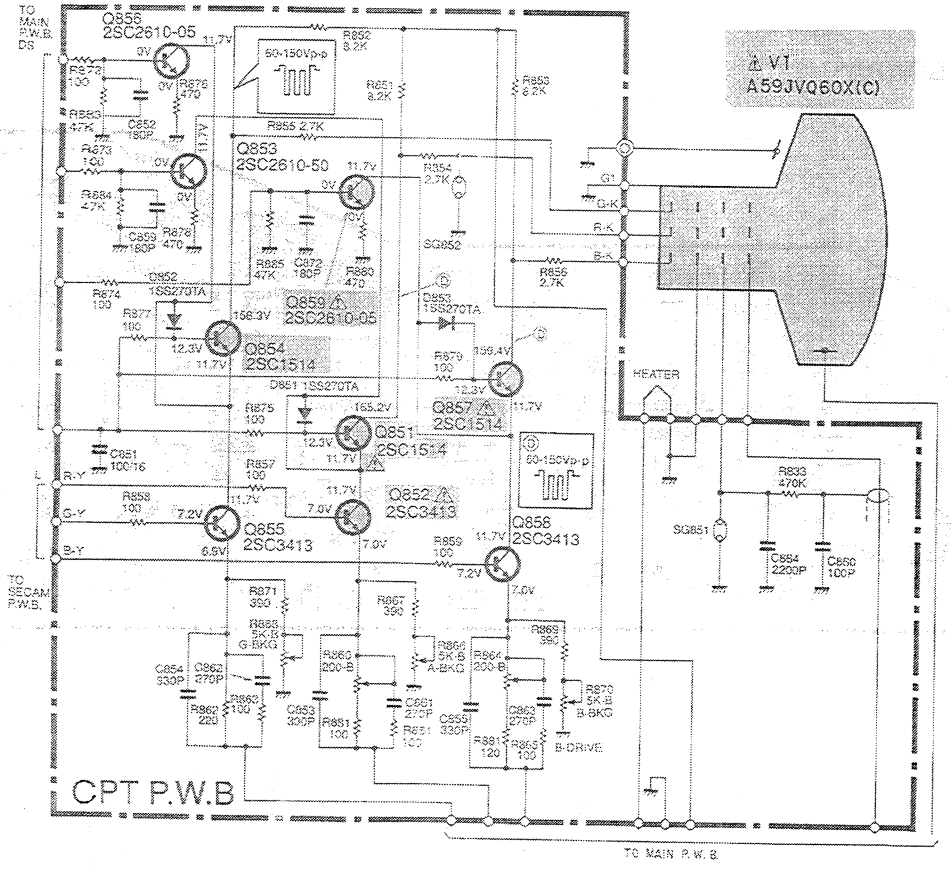

# REPLACEMENT PARTS LIST

**ABBREVIATIONS:** Capacitors.....CD: Ceramic disk, PF: Polyester film, EL: Electrolytic, PP: Polypropylene, PR: Paper, TA: Tantalum, TM: Trimmer.
Resistors..... CF: Carbon film, CC: Carbon composition, MF: Metal oxide film, VR: Variable resistor, WW: Wire would, FR: Fuse resistor, MG: Metal glazed.
Semiconductor...TR: Transistor, DI: Diode, ZD: Zener diode, VA: Varistor, TH: Thermistor, IC: IC.

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| CAPACITORS | | |
| C001 | 0800023 | EL 22MF 16V |
| C002 | 0800023 | EL 22MF 16V |
| C003 | 0800023 | EL 22MF 16V |
| C005 | 0880018 | PF 0.22MF +–10% 50V |
| C1101 | 0800049 | EL 100MF 16V |
| C1102 | 0800049 | EL 100MF 16V |
| C1103 | 0800072 | EL 470MF 6.3V |
| C1104 | 0246458 | CD 56PF +–5% 50V |
| C1105 | 0248668 | CD 22PF +–5% 50V |
| C1106 | 0248684 | CD 100PF +–5% 50V |
| C1107 | 0248684 | CD 100PF +–5% 50V |
| C1108 | 0248684 | CD 100PF +–5% 50V |
| C1109 | 0248684 | CD 100PF +–5% 50V |
| C1110 | 0800015 | EL 10MF 16V |
| C1111 | 0800015 | EL 10MF 16V |
| C1112 | 0800015 | EL 10MF 16V |
| C1113 | 0800003 | EL 1MF 50V |
| C1114 | 0800049 | EL 100MF 16V (2918) |
| C1115 | 0800003 | EL 1MF 50V |
| C1120 | 0244171 | CD 0.01MF +80–20% 50V |
| C1121 | 0244171 | CD 0.01MF +80–20% 50V |
| C1122 | 0244171 | CD 0.01MF +80–20% 50V |
| C1123 | 0244171 | CD 0.01MF +80–20% 50V |
| C1124 | 0880036 | PF 2700PF +–10% 50V |
| C1125 | 0249093 | CD 470PF +–5% 50V |
| C1126 | 0980035 | CD 100PF +–10% 50V |
| C1127 | 0248694 | CD 270PF +–5% 50V |
| C1128 | 0274775 | PF 0.1MF +–10% 50V |
| C1129 | 0274775 | PF 0.1MF +–10% 50V |
| C1131 | 0800047 | EL 100MF 6.3V |
| C1132 | 0248694 | CD 270PF +–5% 50V |
| C1133 | 0800023 | EL 22MF 16V |
| C1142 | 0244171 | CD 0.01MF +80–20% 50V |
| C1143 | 0244171 | CD 0.01MF +80–20% 50V |
| C1147 | 0244171 | CD 0.01MF +80–20% 50V |
| C1148 | 0800047 | EL 100MF 6.3V |
| C1149 | 0800003 | EL 1MF 50V (2718/2918) |
| C1301 | 0800049 | EL 100MF 16V |
| C1303 | 0800057 | EL 220MF 10V |
| C1304 | 0800082 | EL 1000MF 16V |
| C1305 | 0800015 | EL 10MF 16V |
| C1306 | 0800015 | EL 10MF 16V |
| C1308 | 0800015 | EL 10MF 16V |
| C1309 | 0800015 | EL 10MF 16V |
| C1310 | 0800015 | EL 10MF 16V |
| C1312 | 0800015 | EL 10MF 16V |
| C1313 | 0800015 | EL 10MF 16V |
| C1315 | 0800015 | EL 10MF 16V |
| C1316 | 0800015 | EL 10MF 16V |
| C1317 | 0800015 | EL 10MF 16V |
| C1318 | 0800015 | EL 10MF 16V |
| C1319 | 0800015 | EL 10MF 16V |
| C1321 | 0252396 | EL 10MF 16V |
| C1322 | 0800049 | EL 100MF 16V |
| C1324 | 0800049 | EL 100MF 16V |
| C1326 | 0252396 | EL 10MF 16V |
| C1327 | 0800015 | EL 10MF 16V |
| C1328 | 0252396 | EL 10MF 16V |
| C1329 | 0800015 | EL 10MF 16V |
| C1331 | 0252396 | EL 10MF 16V |
| C1332 | 0800015 | EL 10MF 16V |
| C1334 | 0274763 | PF 0.01MF +–10% 50V |
| C1335 | 0274763 | PF 0.01MF +–10% 50V |
| C1337 | 0274763 | PF 0.01MF +–10% 50V |
| C1338 | 0274763 | PF 0.01MF +–10% 50V |
| C1339 | 0252420 | EL 4.7MF 50V |
| C1340 | 0800016 | EL 10MF 25V |
| C1351 | 0274767 | PF 0.022MF +–10% 50V |
| C201 | 0800087 | EL 2200MF 16V |
| C203 | 0244103 | CD 1500PF +–10% 50V |
| C204 | 0800015 | EL 10MF 16V |
| C205 | 0274751 | PF 1000PF +–10% 50V |
| C206 | 0274751 | PF 1000PF +–10% 50V |
| C251 | 0248640 | CD 10PF +–0.25% 50V |
| C253 | 0274763 | PF 0.01MF +–10% 50V |
| C254 | 0274763 | PF 0.01MF +–10% 50V |
| C255 | 0246420 | CD 10PF +–0.25% 50V |
| C256 | 0246464 | CD 100PF +–5% 50V |
| C257 | 0274763 | PF 0.01MF +–10% 50V |
| C258 | 0274763 | PF 0.01MF +–10% 50V |
| C259 | 0800001 | EL 0.47MF 50V |
| C260 | 0274763 | PF 0.01MF +–10% 50V |
| C262 | 0246446 | CD 18PF +–5% 50V |
| C264 | 0246448 | CD 22PF +–5% 50V |
| C265 | 0800001 | EL 0.47MF 50V |
| C266 | 0274751 | PF 1000PF +–10% 50V |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION | SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|---|---|---|
| C267 | 0800049 | EL 100MF 16V | C4009 | 0800082 | EL 1000MF 16V |
| C269 | 0274763 | PF 0.01MF +–10% 50V | C401 | 0274763 | PF 0.01MF +–10% 50V (2718/2918) |
| C270 | 0274763 | PF 0.01MF +–10% 50V | C4010 | 0252396 | EL 10MF 16V |
| C271 | 0274763 | PF 0.01MF +–10% 50V | C4011 | 0252396 | EL 10MF 16V |
| C272 | 0880017 | PF 0.15MF +–10% 50V | C4012 | 0800001 | EL 0.47MF 50V |
| C274 | 0248638 | CD 8PF +–0.25PF 50V | C4013 | 0253082 | EL 1MF 50V |
| C275 | 0248638 | CD 8PF +–0.25PF 50V | C4014 | 0800001 | EL 0.47MF 50V |
| C276 | 0880016 | PF 0.1MF +–10% 50V | C4015 | 0253082 | EL 1MF 50V |
| C278 | 0800015 | EL 10MF 16V | C4016 | 0800058 | EL 220MF 16V |
| C280 | 0248638 | CD 8PF +–0.25PF 50V | C4017 | 0253066 | EL 10MF 25V |
| C282 | 0248638 | CD 8PF +–0.25PF 50V | C4026 | 0800015 | EL 10MF 16V |
| C305 | 0274763 | PF 0.01MF +–10% 50V | C403 | 0800015 | EL 10MF 16V |
| C306 | 0248668 | CD 22PF +–5% 50V | C4036 | 0800001 | EL 0.47MF 50V |
| C307 | 0274763 | PF 0.01MF +–10% 50V | C4037 | 0800082 | EL 1000MF 16V |
| C308 | 0800016 | EL 10MF 25V | C4040 | 0800087 | EL 2200MF 16V |
| C309 | 0274763 | PF 0.01MF +–10% 50V | C4041 | 0252987 | EL 2.2MF 50V |
| C310 | 0800003 | EL 1MF 50V | C405 | 0244136 | CD 270PF +–10% 50V |
| C311 | 0800041 | EL 47MF 16V | C406 | 0800015 | EL 10MF 16V |
| C312 | 0800016 | EL 10MF 25V | C4401 | 0800015 | EL 10MF 16V (2918) |
| C313 | 0800005 | EL 2.2MF 50V | C4402 | 0800015 | EL 10MF 16V (2918) |
| C315 | 0800087 | EL 2200MF 16V | C4403 | 0800009 | EL 4.7MF 25V (2918) |
| C316 | 0800049 | EL 100MF 16V | C4004 | 0800009 | EL 4.7MF 25V (2918) |
| C3201 | 0800015 | EL 10MF 16V | C4405 | 0800041 | EL 47MF 16V (2918) |
| C3202 | 0800049 | EL 100MF 16V | C4406 | 0800015 | EL 10MF 16V (2918) |
| C3203 | 0800049 | EL 100MF 16V | C4407 | 0800015 | EL 10MF 16V (2918) |
| C3204 | 0880009 | PF 0.01MF +–10% 50V | C4408 | 0274773 | PF 0.068MF +–10% 50V (2918) |
| C3205 | 0880009 | PF 0.01MF +–10% 50V | C441 | 0248672 | CD 33PF +–5% 50V |
| C3206 | 0890062 | CD 12PF +–5% 50V | C444 | 0274763 | PF 0.01MF +–10% 50V |
| C3207 | 0800003 | EL 1MF 50V | C445 | 0800023 | EL 22MF 16V |
| C3208 | 0880009 | PF 0.01MF +–10% 50V | C448 | 0257048 | EL 2.2MF 25V |
| C3209 | 0880009 | PF 0.01MF +–10% 50V | C449 | 0257048 | EL 2.2MF 25V |
| C321 | 0800049 | EL 100MF 16V | C4519 | 0800016 | EL 10MF 25V |
| C3210 | 0252396 | EL 10MF 16V | C452 | 0800009 | EL 4.7MF 25V |
| C3211 | 0880009 | PF 0.01MF +–10% 50V | C4520 | 0800059 | EL 220MF 25V |
| C3212 | 0800003 | EL 1MF 50V | C4521 | 0274761 | PF 6800PF +–10% 50V |
| C3213 | 0890084 | CD 560PF +–10% 50V | C4522 | 0274761 | PF 6800PF +–10% 50V |
| C3214 | 0880003 | PF 1000PF +–10% 50V | C4523 | 0800059 | EL 220MF 25V |
| C3215 | 0800041 | EL 47MF 16V | C4525 | 0274775 | PF 0.1MF +–10% 50V |
| C3216 | 0800015 | EL 10MF 16V | C4526 | 0880016 | PF 0.1MF +–10% 50V |
| C3217 | 0800015 | EL 10MF 16V | C4527 | 0800083 | EL 1000MF 25V |
| C3218 | 0800015 | EL 10MF 16V | C4528 | 0800083 | EL 1000MF 25V |
| C3219 | 0800003 | EL 1MF 50V | C453 | 0251087 | EL 1MF 25V |
| C3220 | 0880003 | PF 1000PF +–10% 50V (2518) | C453 | 0274763 | PF 0.01MF +–10% 50V |
| C3221 | 0252417 | EL 1MF 50V | C4530 | 0800044 | EL 47MF 50V |
| C3222 | 0800003 | EL 1MF 50V | C4531 | 0800074 | EL 470MF 16V |
| C3223 | 0248674 | CD 39PF +–5% 50V | C4532 | 0800012 | EL 4.7MF 50V |
| C3501 | 0800015 | EL 10MF 16V | C4538 | 0880018 | PF 0.22MF +–10% 50V |
| C3502 | 0246454 | CD 39PF +–5% 50V | C454 | 0880057 | PF 0.1MF +–10% 50V |
| C3503 | 0274763 | PF 0.01MF +–10% 50V | C4560 | 0800003 | EL 1MF 50V (2518) |
| C3505 | 0800049 | EL 100MF 16V | C4561 | 0800049 | EL 100MF 16V |
| C3506 | 0248688 | CD 150PF +–5% 50V | C458 | 0800041 | EL 47MF 16V |
| C3810 | 0800049 | EL 100MF 16V | C459 | 0800041 | EL 47MF 16V |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| C462 | 0800009 | EL 4.7MF 25V |
| C463 | 0251087 | EL 1MF 25V |
| C464 | 0880057 | PF 0.1MF +–10% 50V |
| C471 | 0890066 | CD 27PF +–5% 50V |
| C472 | 0890066 | CD 27PF +–5% 50V |
| C473 | 0890066 | CD 27PF +–5% 50V |
| C483 | 0880009 | PF 0.01MF +–10% 50V |
| C484 | 0890056 | CD 6PF +–0.5% 50V |
| C485 | 0880016 | PF 0.1MF +–10% 50V |
| C486 | 0800015 | EL 10MF 16V |
| C488 | 0880003 | PF 1000PF +–10% 50V |
| C489 | 0248688 | CD 150PF +–5% 50V |
| C5001 | 0248678 | CD 56PF +–5% 50V |
| C5002 | 0248107 | CD 220PF +–5% 50V |
| C5003 | 0274763 | PF 0.01MF +–10% 50V |
| C5005 | 0274763 | PF 0.01MF +–10% 50V |
| C5006 | 0274763 | PF 0.01MF +–10% 50V |
| C5007 | 0274763 | PF 0.01MF +–10% 50V |
| C5008 | 0274763 | PF 0.01MF +–10% 50V |
| C5009 | 0274763 | PF 0.01MF +–10% 50V |
| C501 | 0248680 | CD 68PF +–5% 50V |
| C5010 | 0248666 | CD 18PF +–5% 50V |
| C5011 | 0248686 | CD 120PF +–5% 50V |
| C5012 | 0800003 | EL 1MF 50V |
| C5013 | 0800003 | EL 1MF 50V |
| C5014 | 0800009 | EL 4.7MF 25V |
| C5015 | 0800003 | EL 1MF 50V |
| C5016 | 0248684 | CD 100PF +–5% 50V |
| C5017 | 0276833 | PF 0.068MF +–5% 50V (2518) |
| C5018 | 0244139 | CD 1000PF +–10% 50V |
| C5019 | 0800007 | EL 3.3MF 50V (2518) |
| C5019 | 0800001 | EL 0.47MF 50V (2718/2918) |
| C502 | 0248678 | CD 56PF +–5% 50V |
| C5020 | 0274763 | PF 0.01MF +–10% 50V |
| C5021 | 0248668 | CD 22PF +–5% 50V |
| C5022 | 0248694 | CD 270PF +–5% 50V |
| C5023 | 0800003 | EL 1MF 50V |
| C5024 | 0800003 | EL 1MF 50V |
| C5025 | 0244113 | CD 330PF +–10% 50V |
| C5026 | 0244113 | CD 330PF +–10% 50V |
| C5027 | 0244113 | CD 330PF +–10% 50V |
| C5028 | 0244113 | CD 330PF +–10% 50V |
| C5029 | 0800041 | EL 47MF 16V |
| C503 | 0246458 | CD 56PF +–5% 50V |
| C5030 | 0244117 | CD 680PF +–10% 50V |
| C5031 | 0248678 | CD 56PF +–5% 50V |
| C5032 | 0800032 | EL 33MF 16V |
| C5033 | 0248672 | CD 33PF +–5% 50V |
| C5034 | 0244116 | CD 180PF +–10% 50V |
| C5035 | 0277025 | PF 0.1MF +–10% 50V |
| C504 | 0274763 | PF 0.01MF +–10% 50V |
| C505 | 0248684 | CD 100PF +–5% 50V |

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| C506 | 0248676 | CD 47PF +–5% 50V |
| C507 | 0248692 | CD 220PF +–5% 50V |
| C508 | 0244116 | CD 180PF +–10% 50V |
| C509 | 0274763 | PF 0.01MF +–10% 50V |
| C511 | 0274763 | PF 0.01MF +–10% 50V |
| C512 | 0800003 | EL 1MF 50V |
| C513 | 0274763 | PF 0.01MF +–10% 50V |
| C514 | 2784695 | TM 50PF |
| C515 | 0248670 | CD 27PF +–5% 50V |
| C516 | 2784695 | TM 50PF |
| C517 | 0274763 | PF 0.01MF +–10% 50V |
| C518 | 0274775 | PF 0.1MF +–10% 50V |
| C519 | 0251073 | EL 2.2MF 16V |
| C520 | 0274763 | PF 0.01MF +–10% 50V |
| C521 | 0274667 | PF 0.022MF +–5% 50V |
| C522 | 0800003 | EL 1MF 50V |
| C523 | 0274667 | PF 0.022MF +–5% 50V |
| C524 | 0274763 | PF 0.01MF +–10% 50V |
| C525 | 0274763 | PF 0.01MF +–10% 50V |
| C526 | 0248639 | CD 9PF +–0.25PF 50V (2518) |
| C526 | 0248639F | CD 9PF +–2% 50V (2718/2918) |
| C530 | 0800082 | EL 1000MF 16V |
| C530A | 0800003 | EL 1MF 50V |
| C532 | 0276341 | PF 0.1MF +–10% 50V |
| C533 | 0800082 | EL 1000MF 16V |
| C534 | 0252417 | EL 1MF 50V |
| C574 | 0248682 | CD 82PF +–5% 50V |
| C601 | 0274669 | PF 0.033MF +–5% 50V (2518) |
| C601 | 0276235 | PF 3300PF +–5% 50V (2718/2918) |
| C6010 | 0800003 | EL 1MF 50V |
| C606 | 0880044 | PF 0.01MF +–10% 50V (2518) |
| C606 | 0274763 | PF 0.01MF +–10% 50V (2718/2918) |
| C607 | 0890015 | CD 33PF +–20% 50V |
| C608 | 0890032 | CD 560PF +–10% 50V |
| C609 | 0800007 | EL 3.3MF 50V |
| C610 | 0800068 | EL 330MF 35V |
| C611 | 0880057 | PF 0.1MF +–10% 50V (2518) |
| C611 | 0274775 | PF 0.1MF +–10% 50V(2718/2918) |
| C612 | 0800003 | EL 1MF 50V |
| C613 | 0800003 | EL 1MF 50V |
| C615 | 0880057 | PF 0.1MF +–10% 50V 2518) |
| C615 | 0274775 | PF 0.1MF +–10% 50V (2718/2918) |
| C616 | 0252969 | EL 2200MF 25V |
| C618 | 0292716 | TA 1MF +–10% 20V |
| C620 | 0800032 | EL 33MF 16V |
| C623 | 0800049 | EL 100MF 16V |
| C625 | 0880062 | PF 0.22MF +–10% 50V |
| C651 | 0800023 | EL 22MF 16V |
| C652 | 0251087 | EL 1MF 25V |
| C653 | 0251087 | EL 1MF 25V |
| C654 | 0800041 | EL 47MF 16V |
| C655 | 0252959 | EL 4.7MF 25V |

**PRODUCT SAFETY NOTE**: Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION | SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|---|---|---|
| C656 | 0244109 | CD 4700PF +–10% 50V | C734 | 0800076 | EL 470MF 31.5V |
| C657 | 0252416 | EL 0.47MF 50V | C735 | 0243510 | CD 560PF +–10% 500V |
| C658 | 0800015 | EL 10MF 16V (2518/2718) | C738 | 0800015 | EL 10MF 16V |
| C659 | 0253943 | EL 0.33MF 50V (2518/2718) | C739 | 0252959 | EL 4.7MF 25V |
| C659 | 0880062 | PF 0.22MF +–10% 50V (2918) | C740 | 0800023 | EL 22MF 16V |
| C660 | 0279849 | PF 0.015MF +–10% 100V | C741 | 0800026 | EL 22MF 50V (2518) |
| C686 | 0274755 | PF 2200PF +–10% 50V | C741 | 0800042 | EL 47MF 25V (2718/2918) |
| C700 | 0800058 | EL 220MF 16V | C742 | 0800003 | EL 1MF 50V |
| C7000 | 0800049 | EL 100MF 16V | C743 | 0880048 | PF 0.022MF +–10% 50V (2518) |
| C7001 | 0274753 | PF 1500PF +–10% 50V | C743 | 0274767 | PF 0.022MF +–10% 50V (2718/2918) |
| C7002 | 0800012 | EL 4.7MF 50V | C746 | 0880057 | PF 0.1MF +–10% 50V (2518) |
| C7003 | 0800003 | EL 1MF 50V | C746 | 0274775 | PF 0.1MF +–10% 50V (2718/2918) |
| C7004 | 0274767 | PF 0.022MF +–10% 50V | C751 | 0800018 | EL 10MF 50V |
| C7005 | 0274673 | PF 0.068MF +–5% 50V (2518) | C753 | 0299668 | PP 3600PF +–5% 1600V |
| C7005 | 0276239 | PF 0.068MF 50V +–5% (2718/2918) | C756 | 0800003 | EL 1MF 50V |
| C703 | 0274767 | PF 0.022MF +–10% 50V | C782 | 0249491 | CD 470PF +–10% 2.5KV |
| C704 | 0274765 | PF 0.015MF +–10% 50V | C785 | 0244507 | CD 3300PF +–10% 500V |
| C705 | 0800005 | EL 2.2MF 50V | C786 | 0247838 | CD 22PF +–5% 500V |
| C706 | 0274757 | PF 3300PF +–10% 50V | C7912 | 0244141 | CD 0.01MF +–10% 50V |
| C707 | 0274655 | PF 2200PF +–5% 50V (2518) | C7913 | 0800015 | EL 10MF 16V |
| C707 | 0276221 | PF 2200PF +–5% 50V (2718/2918) | C851 | 0800049 | EL 100MF 16V |
| C708 | 0244104 | CD 1800PF +–10% 50V | C852 | 0244116 | CD 180PF +–10% 50V |
| C709 | 0244116 | CD 180PF +–10% 50V | C853 | 0244229 | CD 150PF +–10% 50V (2518) |
| C711 | 0244118 | CD 470PF +–10% 50V | C853 | 0248686 | CD 120PF +–5% 50V (2718/2918) |
| C715 | 0247850 | CD 68PF +–5% 500V | C854 | 0244229 | CD 150PF +–10% 50V (2518) |
| ⚠ C716 | 0244504 | CD 1800PF +–10% 500V | C854 | 0248686 | CD 120PF +–5% 50V (2718/2918) |
| ⚠ C717 | 0244501 | CD 1000PF +–10% 500V | C855 | 0244229 | CD 150PF +–10% 50V (2518) |
| ⚠ C718 | 0880057 | PF 0.1MF +–10% 50V (2518) | C855 | 0248686 | CD 120PF +–5% 50V (2718/2918) |
| ⚠ C718 | 0274775 | PF 0,1MF +–10% 50V (2718/2918) | C859 | 0244116 | CD 180PF +–10% 50V |
| ⚠ C719 | 0244113 | CD 330PF +–10% 50V | C860 | 0243425 | CD 100PF +–10% 1.6KV |
| C721 | 0299940F | PF 0.015MF +–5% 1.6KV | C861 | 0248694 | CD 270PF +–5% 50V |
| C722 | 0299984 | PP 0.022MF +–5% 630V | C862 | 0248694 | CD 270PF +–5% 50V |
| C723 | 0299931 | PP 0.27MF +–10% 200V (2518/2918) | | | |
| C723 | 0299932 | PP 0.33MF +–10% 200V (2718) | C863 | 0248694 | CD 270PF +–5% 50V |
| C7230 | 0251771 | EL 220MF 160V (2518) | C864 | 0244215 | CD 2200PF +–10% 2KV |
| C7230 | 0259154F | EL 220MF 160V (2718/2918) | C872 | 0244116 | CD 180PF +–10% 50V |
| C7231 | 0253974N | EL 33MF 250V | C873 | 0243509 | CD 470PF +–10% 500V |
| C7232 | 0800021 | EL 10MF 100V | ⚠ C901 | 0279698 | PF 0.22MF +–20% 250V |
| C724 | 0299930 | PP 0.22MF +–10% 200V (2518/2718) | C901A | 0279747 | PF 0.022MF +–20% 100V |
| C724 | 0299932 | PP 0.33MF +–10% 200V (2918) | C903 | 0248594F | CD 0.01MF +80–20% 250V |
| C725 | 0299933 | PP 0.39MF +–10% 200V | ⚠ C904 | 0248593F | CD 4700PF +80–20% 250V |
| C726 | 0299932 | PP 0.33MF +–10% 200V (2518/2718) | ⚠ C905 | 0248593F | CD 4700PF +80–20% 250V |
| C726 | 0299931 | PP 0.27MF +–10% 200V (2918) | ⚠ C906 | 0251883 | EL 220MF 400V (2518) |
| C727 | 0259472 | EL 6.8MF 25V | ⚠ C906 | 0259097 | EL 330MF 400V (2718/2918) |
| C728 | 0890087 | CD 1000PF +–10% 50V | ⚠ C907 | 0258114 | EL 330MF 50V |
| C729 | 0244503 | CD 1500PF +–10% 50V | C908 | 0274659 | PF 4700PF +–5% 50V |
| C730 | 0244139 | CD 1000PF +–10% 50V | C908A | 0274651 | PF 1000PF +–5% 50V |
| C731 | 0800041 | EL 47MF 16V | C909 | 0248694 | CD 270PF +–5% 50V |
| C732 | 0800012 | EL 4.7MF 50V | C910 | 0255019F | EL 220MF 63V |
| C733 | 0244104 | CD 1800PF +–10% 50V | C911 | 0800016 | EL 10MF 25V |
| C7335 | 0800007 | EL 3.3MF 50V | C912 | 0249159 | CD 4700PF +100–0% 125V |
| C7336 | 0800015 | EL 10MF 16V | C913 | 0244215 | CD 2200PF +–10% 2KV |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| C914 | 0249159 | CD 4700PF +100–0% 125V |
| C915 | 0274661 | PF 6800PF +–5% 50V |
| C916 | 0800047 | EL 100MF 6.3V |
| C918 | 0800003 | EL 1MF 50V |
| C919 | 0800053 | EL 100MF 50V |
| C921 | 0800003 | EL 1MF 50V |
| C929 | 0253952R | EL 1MF 160V |
| C930 | 0276227 | PF 6800PF +–5% 50V |
| C931 | 0800087 | EL 2200MF 16V |
| C950 | 0251704 | EL 470MF 160V |
| C951 | 0800081 | EL 1000MF 10V (2518) |
| C952 | 0252987 | EL 2.2MF 50V |
| C953 | 0800083 | EL 1000MF 25V |
| C955 | 0245603 | CD 220PF +–10% 1KV |
| C957 | 0244213 | CD 1500PF +–10% 2KV |
| C959 | 0800049 | EL 100MF 16V |
| C960 | 0245606 | CD 560PF +–10% 1KV |
| C961 | 0800003 | EL 1MF 50V |
| C971 | 0800003 | EL 1MF 50V |
| C995 | 0249391 | CD 1000PF +–10% (2518) |
| C995 | 0249498 | CD 1000PF 4000V (2718/2918) |
| C996 | 0249391 | CD 1000PF +–10% (2518) |
| C996 | 0249498 | CD 1000PF 4000V (2718/2918) |
| C997 | 0249391 | CD 1000PF +–10% (2518) |
| C997 | 0249498 | CD 1000PF 4000V (2718/2918) |
| C998 | 0249392 | CD 2200PF +–10% (2518) |
| C998 | 0247974 | CD 2200PF +80–20% (2718/2918) |
| C999 | 0249392 | CD 2200PF +–10% (2518) |
| C999 | 0247974 | CD 2200PF +80–20% (2718/2918) |

## RESISTORS

| | | |
|---|---|---|
| R001 | 0700048 | CF 3.9K OHM +–5% 1/16W |
| R002 | 0700048 | CF 3.9K OHM +–5% 1/16W |
| R004 | 0700058 | CF 22K OHM +–5% 1/16W |
| R006 | 0100065 | CF 1K OHM +–5% 1/8W (2718/2918) |
| R078J | 0100041 | CF 100 OHM +–5% 1/8W |
| R1101 | 0700061 | CF 33K OHM +–5% 1/16W |
| R1102 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1104 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1104 | 0700051 | CF 5.6K OHM +–5% 1/16W (2718/2918) |
| R1105 | 0700061 | CF 33K OHM +–5% 1/16W |
| R1106 | 0700063 | CF 47K OHM +–5% 1/16W |
| R1107 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1108 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1109 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1110 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1111 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1112 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1113 | 0700051 | CF 5.6K OHM +–5% 1/16W |

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| R1114 | 0700063 | CF 47K OHM +–5% 1/16W (2518/2918) |
| R1115 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1116 | 0700031 | CF 180 OHM +–5% 1/16W |
| R1117 | 0700031 | CF 180 OHM +–5% 1/16W |
| R1118 | 0700031 | CF 180 OHM +–5% 1/16W |
| R1119 | 0110175 | MF 18K OHM +–5% 1W |
| R1121 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1122 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R1123 | 0700054 | CF 10KOHM +–5% 1/16W |
| R1124 | 0700056 | CF 15K OHM +–5% 1/16W |
| R1125 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1127 | 0110273 | MF 15K OHM +–5% 2W |
| R1128 | 0700057 | CF 18K OHM +–5% 1/16W |
| R1129 | 0700057 | CF 18K OHM +–5% 1/16W |
| R1130 | 0700046 | CF 2.7K OHM +–5% 1/16W |
| R1131 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1132 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R1133 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1134 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1135 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1136 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1139 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1140 | 0100133 | CF 680K OHM +–5% 1/8W |
| R1141 | 0700027 | CF 100 OHM +–5% 1/16W |
| R1142 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1143 | 0700067 | CF 100K OHM +–5% 1/16W |
| R1144 | 0700044 | CF 1.8K OHM +–5% 1/16W |
| R1145 | 0700046 | CF 2.7K OHM +–5% 1/16W |
| R1146 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1147 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1148 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1149 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1150 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1151 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1152 | 0700058 | CF 22K OHM +–5% 1/16W |
| R1153 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1154 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1155 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1156 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1157 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1158 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1159 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1160 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1161 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1162 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R1163 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R1164 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1165 | 0700027 | CF 100 OHM +–5% 1/16W |
| R1166 | 0700056 | CF 15K OHM +–5% 1/16W |
| R1167 | 0700061 | CF 33K OHM +–5% 1/16W |
| R1168 | 0700054 | CF 10K OHM +–5% 1/16W |
| R1169 | 0700041 | CF 1K OHM +–5% 1/16W |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION | SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|---|---|---|
| R1170 | 0700062 | CF 39K OHM +–5% 1/16W | R1330 | 0700063 | CF 47K OHM +–5% 1/16W |
| R1171 | 0700058 | CF 22K OHM +–5% 1/16W | R1334 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1172 | 0700058 | CF 22K OHM +–5% 1/16W | R1335 | 0700063 | CF 47K OHM +–5% 1/16W |
| R1174 | 0700058 | CF 22K OHM +–5% 1/16W | R1336 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1175 | 0700054 | CF 10K OHM +–5% 1/16W | R1337 | 0700063 | CF 47K OHM +–5% 1/16W |
| R1176 | 0700067 | CF 100K OHM +–5% 1/16W | R1338 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1177 | 0700054 | CF 10K OHM +–5% 1/16W | R1339 | 0187038 | CF 75 OHM +–5% 1/16W |
| R1178 | 0700054 | CF 10K OHM +–5% 1/16W | R1344 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1179 | 0700054 | CF 10K OHM +–5% 1/16W (2518) | R1345 | 0187038 | CF 75 OHM +–5% 1/16W |
| R1179 | 0700052 | CF 6.8K OHM +–5% 1/16W (2718/2918) | R1347 | 0700063 | CF 47K OHM +–5% 1/16W |
| R1180 | 0700054 | CF 10K OHM +–5% 1/16W | R1348 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1181 | 0700054 | CF 10K OHM +–5% 1/16W | R1349 | 0700063 | CF 47K OHM +–5% 1/16W |
| R1182 | 0700055 | CF 12K OHM +–5% 1/16W (2518) | R1350 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1182 | 0700051 | CF 5.6K OHM +–5% 1/16W (2718/2918) | R1356 | 0700067 | CF 100K OHM +–5% 1/16W |
| R1183 | 0700056 | CF 15K OHM +–5% 1/16W | R1357 | 0700067 | CF 100K OHM +–5% 1/16W |
| R1184 | 0110175 | MF 18K OHM +–5% 1W | R1358 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1187 | 0700045 | CF 2.2K OHM +–5% 1/16W | R1359 | 0100041 | CF 100 OHM +–5% 1/8W |
| R1188 | 0700045 | CF 2.2K OHM +–5% 1/16W | R1360 | 0700065 | CF 68K OHM +–5% 1/16W |
| R1190 | 0700041 | CF 1K OHM +–5% 1/16W | R1361 | 0700061 | CF 33K OHM +–5% 1/16W |
| R1191 | 0700058 | CF 22K OHM +–5% 1/16W | R1362 | 0700065 | CF 68K OHM +–5% 1/16W |
| R1193 | 0155722 | VR 2K OHM-B | R1363 | 0700061 | CF 33K OHM +–5% 1/16W |
| R1194 | 0155711 | VR 2K OHM-B | R1366 | 0700051 | CF 5.6K OHM +–5% 1/16W |
| R1195 | 0155711 | VR 2K OHM-B (2718/2918) | R1367 | 0700065 | CF 68K OHM +–5% 1/16W |
| R1196 | 0155711 | VR 2K OHM-B | R1368 | 0700065 | CF 68K OHM +–5% 1/16W |
| R1197 | 0155712 | VR 20K OHM-B | R1369 | 0700065 | CF 68K OHM +–5% 1/16W |
| R1198 | 0700041 | CF 1K OHM +–5% 1/16W | R1370 | 0700061 | CF 33K OHM +–5% 1/16W |
| R1199 | 0100089 | CF 10K OHM +–5% 1/8W | R1371 | 0700065 | CF 68K OHM +–5% 1/16W |
| R1200 | 0700047 | CF 3.3K OHM +–5% 1/16W | R1372 | 0700061 | CF 33K OHM +–5% 1/16W |
| R1201 | 0700049 | CF 4.7K OHM +–5% 1/16W | R1373 | 0700032 | CF 220 OHM +–5% 1/16W |
| R1202 | 0700054 | CF 10K OHM +–5% 1/16W | R1374 | 0100059 | CF 560 OHM +–5% 1/8W |
| R1204 | 0700041 | CF 1K OHM +–5% 1/16W | R1375 | 0700042 | CF 1.2K OHM +–5% 1/16W |
| R1301 | 0700027 | CF 100 OHM +–5% 1/16W | R1376 | 0187062 | CF 750 OHM +–5% 1/16W |
| R1302 | 0113733 | CF 220 OHM +–5% 1/2W | R1377 | 0700037 | CF 560 OHM +–5% 1/16W |
| R1303 | 0187038 | CF 75 OHM +–5% 1/16W | R1378 | 0700057 | CF 18K OHM +–5% 1/16W |
| R1304 | 0700054 | CF 10K OHM +–5% 1/16W | R1379 | 0114147 | CF 470 OHM +–5% 1/4W |
| R1305 | 0113731 | CF 180 OHM +–5% 1/2W | R1380 | 0100057 | CF 470 OHM +–5% 1/8W |
| R1306 | 0700027 | CF 100 OHM +–5% 1/16W | R1381 | 0100057 | CF 470 OHM +–5% 1/8W |
| R1307 | 0700041 | CF 1K OHM +–5% 1/16W | R1382 | 0100051 | CF 270 OHM +–5% 1/8W |
| R1308 | 0700041 | CF 1K OHM +–5% 1/16W | R1393 | 0700041 | CF 1K OHM +–5% 1/16W |
| R1309 | 0700063 | CF 47K OHM +–5% 1/16W | R202 | 0700051 | CF 5.6K OHM +–5% 1/16W |
| R1310 | 0700027 | CF 100 OHM +–5% 1/16W | R203 | 0700056 | CF 15K OHM +–5% 1/16W |
| R1311 | 0700041 | CF 1K OHM +–5% 1/16W | R204 | 0700067 | CF 100K OHM +–5% 1/16W |
| R1312 | 0700041 | CF 1K OHM +–5% 1/16W | R205 | 0700064 | CF 56K OHM +–5% 1/16W |
| R1313 | 0700063 | CF 47K OHM +–5% 1/16W | R206 | 0700063 | CF 47K OHM +–5% 1/16W |
| R1318 | 0700065 | CF 68K OHM +–5% 1/16W | R207 | 0700067 | CF 100K OHM+–5% 1/16W |
| R1319 | 0700061 | CF 33K OHM +–5% 1/16W | R209 | 0113729 | CF 150 OHM +–5% 1/2W |
| R1320 | 0187038 | CF 75 OHM +–5% 1/16W | R211 | 0700051 | CF 5.6K OHM +–5% 1/16W |
| R1325 | 0100041 | CF 100 OHM +–5% 1/8W | R213 | 0100123 | CF 270K OHM +–5% 1/8W |
| R1326 | 0700063 | CF 47K OHM +–5% 1/16W | R214 | 0700028 | CF 120 OHM +–5% 1/16W (2718/2918) |
| R1327 | 0100041 | CF 100 OHM +–5% 1/8W | R215 | 0700064 | CF 56K OHM +–5% 1/16W |
| R1328 | 0100041 | CF 100 OHM +–5% 1/8W | R216 | 0700026 | CF 82 OHM +–5% 1/16W |
| R1329 | 0187038 | CF 75 OHM +–5% 1/16W | R252 | 0700041 | CF 1K OHM +–5% 1/16W |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION | SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|---|---|---|
| R253 | 0700041 | CF 1K OHM +–5% 1/16W | R3219 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R254 | 0700041 | CF 1K OHM +–5% 1/16W | R3220 | 0100117 | CF 150K OHM +–5% 1/8W |
| R255 | 0100059 | CF 560 OHM +–5% 1/8W | R3221 | 0700051 | CF 5.6K OHM +–5% 1/16W |
| R256 | 0100059 | CF 560 OHM +–5% 1/8W | R3222 | 0700051 | CF 5.6K OHM +–5% 1/16W |
| R257 | 0100053 | CF 330 OHM +–5% 1/8W | R3224 | 0700058 | CF 22K OHM +–5% 1/16W |
| R258 | 0700054 | CF 10K OHM +–5% 1/16W | R3225 | 0700054 | CF 10K OHM +–5% 1/16W |
| R259 | 0700063 | CF 47K OHM +–5% 1/16W | R3226 | 0700054 | CF 10K OHM +–5% 1/16W |
| R260 | 0700054 | CF 10K OHM +–5% 1/16W | R3227 | 0700027 | CF 100 OHM +–5% 1/16W |
| R261 | 0700031 | CF 180 OHM +–5% 1/16W | R3228 | 0700041 | CF 1K OHM +–5% 1/16W |
| R262 | 0700041 | CF 1K OHM +–5% 1/16W | R3229 | 0700027 | CF 100 OHM +–5% 1/16W |
| R263 | 0100131 | CF 560K OHM +–5% 1/8W | R3232 | 01195051 | FR 2.2 OHM +–5% 1/4W |
| R264 | 0700041 | CF 1K OHM +–5% 1/16W | R3235 | 0700041 | CF 1K OHM +–5% 1/16W |
| R265 | 0700029 | CF 150 OHM +–5% 1/16W | R3236 | 0700036 | CF 470 OHM +–5% 1/16W |
| R266 | 0700041 | CF 1K OHM +–5% 1/16W | R3237 | 0700059 | CF 27K OHM +–5% 1/16W |
| R272 | 0150158 | VR 30K OHM-B RV-6 | R3239 | 0700067 | CF 100K OHM +–5% 1/16W |
| R277 | 0700063 | CF 47K OHM +–5% 1/16W | R3240 | 0700047 | CF 3.3K OHM +–5% 1/16W |
| R278 | 0700054 | CF 10K OHM +–5% 1/16W | R3241 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R279 | 0700027 | CF 100 OHM +–5% 1/16W | R3242 | 0700051 | CF 5.6K OHM +–5% 1/16W |
| R280 | 0700041 | CF 1K OHM +–5% 1/16W | R336 | 0700063 | CF 47K OHM +–5% 1/16W |
| R281 | 0700041 | CF 1K OHM +–5% 1/16W | R337 | 0700056 | CF 15K OHM +–5% 1/16W |
| R282 | 0700034 | CF 330 OHM +–5% 1/16W | R338 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R283 | 0700054 | CF 10K OHM +–5% 1/16W | R339 | 0700053 | CF 8.2K OHM +–5% 1/16W |
| R286 | 0700047 | CF 3.3K OHM +–5% 1/16W | R345 | 0100127 | CF 390K OHM +–5% 1/8W |
| R287 | 0100081 | CF 4.7K OHM +–5% 1/8W | R346 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R301 | 0700027 | CF 100 OHM +–5% 1/16W | R347 | 0700052 | CF 6.8K OHM +–5% 1/16W |
| R302 | 0700041 | CF 1KOHM +–5% 1/16W | R350 | 0700061 | CF 33K OHM +–5% 1/16W |
| R303 | 0700038 | CF 680 OHM +–5% 1/16W | R3501 | 0700032 | CF 220 OHM +–5% 1/16W |
| R304 | 0700038 | CF 680 OHM +–5% 1/16W | R3501J | 0100041 | CF 100 OHM +–5% 1/8W |
| R305 | 0700029 | CF 150 OHM +–5% 1/16W (2518) | R3502 | 0700035 | CF 390 OHM +–5% 1/16W |
| R305 | 0700041 | CF 1K OHM +–5% 1/16W (2718/2918) | R3502J | 0100041 | CF 100 OHM +–5% 1/8W |
| R306 | 0700039 | CF 820 OHM +–5% 1/16W | R3503 | 0700029 | CF 150 OHM +–5% 1/16W |
| R309 | 0700054 | CF 10K OHM +–5% 1/16W | R3504 | 0700053 | CF 8.2K OHM +–5% 1/16W |
| R312 | 0700067 | CF 100K OHM +–5% 1/16W | R3505 | 0700041 | CF 1K OHM +–5% 1/16W |
| R317 | 0700034 | CF 330 OHM +–5% 1/16W (2518) | R3506 | 0150282 | VR 500 OHM (B) |
| R3201 | 0114147 | CF 470 OHM +–5% 1/4W | R351 | 0700057 | CF 18K OHM +–5% 1/16W |
| R3202 | 0700067 | CF 100K OHM +–5% 1/16W | R352 | 0700033 | CF 270 OHM +–5% 1/16W |
| R3203 | 0700061 | CF 33K OHM +–5% 1/16W | R353 | 0700044 | CF 1.8K OHM +–5% 1/16W |
| R3204 | 0700054 | CF 10K OHM +–5% 1/16W | R354 | 0700047 | CF 3.3K OHM +–5% 1/16W |
| R3205 | 0700041 | CF 1K OHM +–5% 1/16W | R355 | 0114143 | CF 330 OHM +–5% 1/4W |
| R3206 | 0150136 | VR 5K OHM-B (2518) | R356 | 0114143 | CF 330 OHM +–5% 1/4W |
| R3207 | 0700048 | CF 3.9K OHM +–5% 1/16W | R357 | 0114143 | CF 330 OHM +–5% 1/4W |
| R3208 | 0700048 | CF 3.9K OHM +–5% 1/16W | R358 | 0700027 | CF 100 OHM +–5% 1/16W |
| R3209 | 0700051 | CF 5.6K OHM +–5% 1/16W | R359 | 0700027 | CF 100 OHM +–5% 1/16W |
| R3210 | 0700027 | CF 100 OHM +–5% 1/16W | R360 | 0700027 | CF 100 OHM +–5% 1/16W |
| R3211 | 0700027 | CF 100 OHM +–5% 1/16W | R361 | 0700058 | CF 22K OHM +–5% 1/16W |
| R3212 | 0700045 | CF 2.2K OHM +–5% 1/16W | R363 | 0700041 | CF 1K OHM +–5% 1/16W |
| R3213 | 0700045 | CF 2.2K OHM +–5% 1/16W | R364 | 0100053 | CF 330 OHM +–5% 1/8W |
| R3214 | 0700048 | CF 3.9K OHM +–5% 1/16W | R370 | 0700056 | CF 15K OHM +–5% 1/16W (2718/2918) |
| R3215 | 0700051 | CF 5.6K OHM +–5% 1/16W | R371 | 0700056 | CF 15K OHM +–5% 1/16W (2718/2918) |
| R3216 | 0100117 | CF 150K OHM +–5% 1/8W | R4012 | 0700041 | CF 1K OHM +–5% 1/16W |
| R3217 | 0700039 | CF 820 OHM +–5% 1/16W | R4013 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R3218 | 0700049 | CF 4.7K OHM +–5% 1/16W | R4014 | 0700041 | CF 1K OHM +–5% 1/16W |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION | SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|---|---|---|
| R4015 | 0700049 | CF 4.7K OHM +–5% 1/16W | R4541 | 0700067 | CF 100K OHM +–5% 1/16W (2518) |
| R4016 | 0100065 | CF 1K OHM +–5% 1/8W | R4548 | 0700041 | CF 1K OHM +–5% 1/16W |
| R4017 | 0100065 | CF 1K OHM +–5% 1/8W | R455 | 0700043 | CF 1.5K OHM +–5% 1/16W |
| R4019 | 0700051 | CF 5.6K OHM +–5% 1/16W | R455 | 0700065 | CF 68K OHM +–5% 1/16W |
| R4020 | 0700027 | CF 100 OHM +–5% 1/16W | R456 | 0700063 | CF 47K OHM +–5% 1/16W |
| R405 | 0700041 | CF 1K OHM +–5% 1/16W | R456 | 0700065 | CF 68K OHM +–5% 1/16W |
| R4050 | 0700046 | CF 2.7K OHM +–5% 1/16W | R4560 | 0700043 | CF 1.5K OHM +–5% 1/16W (2518) |
| R406 | 0700048 | CF 3.9K OHM +–5% 1/16W | R4561 | 0700054 | CF 10K OHM +–5% 1/16W |
| R412 | 0700049 | CF 4.7K OHM +–5% 1/16W | R4562 | 0700041 | CF 1K OHM +–5% 1/16W |
| R413 | 0150155 | VR 5K OHM- RV-6 | R4563 | 0100021 | CF 15 OHM +–5% 1/8W (2718/2918) |
| R4401 | 0700052 | CF 6.8K OHM+–5% 1/16W (2918) | R457 | 0700037 | CF 560 OHM +–5% 1/16W |
| R4402 | 0700052 | CF 6.8K OHM +–5% 1/16W (2918) | R457 | 0700041 | CF 1K OHM +–5% 1/16W |
| R4403 | 0150284 | VR 2K OHM-B (2918) | R458 | 0700038 | CF 680 OHM +–5% 1/16W |
| R4404 | 0700051 | CF 5.6K OHM +–5% 1/16W (2918) | R458 | 0700048 | CF 3.9K OHM +–5% 1/16W |
| R4405 | 0700051 | CF 5.6K OHM +–5% 1/16W (2918) | R459 | 0100115 | CF 120K OHM +–5% 1/8W |
| R4407 | 0700054 | CF 10K OHM +–5% 1/16W (2918) | R459 | 0700041 | CF 1K OHM +–5% 1/16W |
| R4408 | 0700054 | CF 10K OHM +–5% 1/16W (2918) | R460 | 0700027 | CF 100 OHM +–5% 1/16W |
| R4409 | 0700053 | CF 8.2K OHM +–5% 1/16W (2918) | R461 | 0700036 | CF 470 OHM +–5% 1/16W |
| R441 | 0700041 | CF 1K OHM +–5% 1/16W | R461 | 0700067 | CF 100K OHM +–5% 1/16W |
| R4410 | 0700045 | CF 2.2K OHM +–5% 1/16W (2918) | R462 | 0700027 | CF 100 OHM +–5% 1/16W |
| R4411 | 0700043 | CF 1.5K OHM +–5% 1/16W (2918) | R462 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R4412 | 0700027 | CF 100 OHM +–5% 1/16W (2918) | R463 | 0100115 | CF 120K OHM +–5% 1/8W |
| R4413 | 0700027 | CF 100 OHM +–5% 1/16W (2918) | R463 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R4414 | 0100065 | CF 1K OHM +–5% 1/8W (2918) | R464 | 0700027 | CF 100 OHM +–5% 1/16W |
| R4415 | 0100065 | CF 1K OHM +–5% 1/8W (2918) | R464 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R4416 | 0700054 | CF 10K OHM +–5% 1/16W (2918) | R465 | 0700043 | CF 1.5K OHM +–5% 1/16W |
| R4417 | 0700054 | CF 10K OHM +–5% 1/16W (2918) | R466 | 0700063 | CF 47K OHM +–5% 1/16W |
| R4418 | 0700041 | CF 1K OHM +–5% 1/16W (2918) | R467 | 0700037 | CF 560 OHM +–5% 1/16W |
| R4419 | 0700041 | CF 1K OHM +–5% 1/16W (2918) | R468 | 0700038 | CF 680 OHM +–5% 1/16W |
| R442 | 0700051 | CF 5.6K OHM +–5% 1/16W | R469 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R4420 | 0700036 | CF 470 OHM +–5% 1/16W (2918) | R470 | 0700054 | CF 10K OHM +–5% 1/16W |
| R443 | 0700041 | CF 1K OHM +–5% 1/16W | R471 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R444 | 0700051 | CF 5.6K OHM +–5% 1/16W | R471 | 0700064 | CF 56K OHM +–5% 1/16W |
| R4440 | 0100047 | CF 180 OHM +–5% 1/8W | R472 | 0700027 | CF 100 OHM +–5% 1/16W |
| R445 | 0700041 | CF 1K OHM +–5% 1/16W | R473 | 0700041 | CF 1K OHM +–5% 1/16W |
| R451 | 0700027 | CF 100 OHM +–5% 1/16W | R481 | 0100061 | CF 680 OHM +–5% 1/8W |
| R451 | 0700067 | CF 100K OHM +–5% 1/16W | R482 | 0700034 | CF 330 OHM +–5% 1/16W |
| R4514 | 0100065 | CF 1K OHM +–5% 1/8W | R483 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R4515 | 0700041 | CF 1K OHM +–5% 1/16W | R484 | 0700052 | CF 6.8K OHM +–5% 1/16W |
| R4516 | 0700041 | CF 1K OHM +–5% 1/16W | R485 | 0700047 | CF 3.3K OHM +–5% 1/16W |
| R452 | 0700045 | CF 2.2K OHM +–5% 1/16W | R486 | 0700067 | CF 100K OHM +–5% 1/16W |
| R4520 | 0114161 | CF 1K OHM +–5% 1/4W | R487 | 0700067 | CF 100K OHM +–5% 1/16W |
| R4526 | 0100047 | CF 180 OHM +–5% 1/8W | R488 | 0700027 | CF 100 OHM +–5% 1/16W |
| R4527 | 01195051 | FR 2.2 OHM +–5% 1/4W | R489 | 0700043 | CF 1.5K OHM +–5% 1/16W |
| R4528 | 01195051 | FR 2.2 OHM +–5% 1/4W | R490 | 0100107 | CF 56K OHM +–5% 1/8W |
| R4529 | 0100047 | CF 180 OHM +–5% 1/8W | R5001 | 0700053 | CF 8.2K OHM +–5% 1/16W |
| R453 | 0700049 | CF 4.7K OHM +–5% 1/16W | R5002 | 0700049 | CF 4.7K OHM +–5% 1/16W |
| R4532 | 0700051 | CF 5.6K OHM +–5% 1/16W | R5003 | 0150037 | VR 5K OHM-B RS-8 |
| R4533 | 0100049 | CF 220 OHM +–5% 1/8W | R5004 | 0700027 | CF 100 OHM +–5% 1/16W |
| R4536 | 0100085 | CF 6.8K OHM +–5% 1/8W | R5005 | 0700059 | CF 27K OHM +–5% 1/16W |
| R454 | 0700049 | CF 4.7K OHM +–5% 1/16W | R5006 | 0700041 | CF 1K OHM +–5% 1/16W |
| R4540 | 0700067 | CF 100K OHM +–5% 1/16W (2518) | R5007 | 0700026 | CF 82 OHM +–5% 1/16W |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION | SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|---|---|---|
| R5008 | 0700043 | CF 1.5K OHM +–5% 1/16W | ⚠ R528 | 0700061 | CF 33K OHM +–5% 1/16W |
| R5009 | 0700046 | CF 2.7K OHM +–5% 1/16W | R529 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R501 | 0700043 | CF 1.5K OHM +–5% 1/16W | R530 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R5010 | 0700064 | CF 56K OHM +–5% 1/16W | R531 | 0700061 | CF 33K OHM +–5% 1/16W |
| R5011 | 0700049 | CF 4.7K OHM +–5% 1/16W | R532 | 0700056 | CF 15K OHM +–5% 1/16W |
| R5012 | 0700054 | CF 10K OHM +–5% 1/16W | R533 | 0700056 | CF 15K OHM +–5% 1/16W |
| R5013 | 0700045 | CF 2.2K OHM +–5% 1/16W (2518) | R534 | 0700056 | CF 15K OHM +–5% 1/16W |
| R5014 | 0700065 | CF 68K OHM +–5% 1/16W (2518) | R535 | 0700057 | CF 18K OHM +–5% 1/16W |
| R5015 | 0700043 | CF 1.5K OHM +–5% 1/16W | R537 | 0100065 | CF 1K OHM +–5% 1/8W |
| R5016 | 0700066 | CF 82K OHM +–5% 1/16W | R539 | 0700037 | CF 560 OHM +–5% 1/16W |
| R5017 | 0700052 | CF 6.8K OHM +–5% 1/16W | R540 | 0700061 | CF 33K OHM +–5% 1/16W |
| R5018 | 0700042 | CF 1.2K OHM +–5% 1/16W | R541 | 0700055 | CF 12K OHM +–5% 1/16W |
| R5019 | 0100117 | CF 150K OHM +–5% 1/8W (2518) | R542 | 0700061 | CF 33K OHM +–5% 1/16W |
| R5019 | 0100121 | CF 220K OHM +–5% 1/8W (2718/2918) | R543 | 0700041 | CF 1K OHM +–5% 1/16W |
| R502 | 0700037 | CF 560 OHM +–5% 1/16W | R544 | 0700041 | CF 1K OHM +–5% 1/16W |
| R5020 | 0700051 | CF 5.6K OHM +–5% 1/16W (2518) | R545 | 0150291 | VR 100K OHM-B |
| R5020 | 0700048 | CF 3.9K OHM +–5% 1/16W (2718/2918) | R546 | 0700044 | CF 1.8K OHM +–5% 1/16W |
| R5021 | 0700046 | CF 2.7K OHM +–5% 1/16W | R548 | 0100071 | CF 1.8K OHM +–5% 1/8W (2718/2918) |
| R5022 | 0700067 | CF 100K OHM +–5% 1/16W | R5999 | 0700049 | CF 4.7K OHM +–5% 1/16W (2518) |
| R5023 | 0700063 | CF 47K OHM +–5% 1/16W | R601 | 0700037 | CF 560 OHM +–5% 1/16W |
| R5024 | 0700056 | CF 15K OHM +–5% 1/16W | R6010 | 0179561 | MG 2.2M OHM +–5% 1/8W |
| R5025 | 0100045 | CF 150 OHM +–5% 1/8W | R6013 | 0114161 | CF 1K OHM +–5% 1/4W |
| R5026 | 0100045 | CF 150 OHM +–5% 1/8W | R604 | 0700054 | CF 10K OHM +–5% 1/16W |
| R5027 | 0100045 | CF 150 OHM +–5% 1/8W | R610 | 0700054 | CF 10K OHM +–5% 1/16W |
| R5028 | 0150038 | VR 10K OHM-B RS-8 | R611 | 0700057 | CF 18K OHM +–5% 1/16W |
| R5029 | 0700051 | CF 5.6K OHM +–5% 1/16W | R612 | 0700058 | CF 22K OHM +–5% 1/16W |
| R5030 | 0700024 | CF 56 OHM +–5% 1/16W | R613 | 0700064 | CF 56K OHM +–5% 1/16W |
| R5031 | 0700027 | CF 100 OHM +–5% 1/16W | R614 | 0700057 | CF 18K OHM +–5% 1/16W |
| R5032 | 0114147 | CF 470 OHM +–5% 1/4W | R615 | 0113735 | CF 270 OHM +–5% 1/2W |
| R5033 | 0700063 | CF 47K OHM +–5% 1/16W | R616 | 0113692 | CF 4.7 OHM +–5% 1/2W |
| R504 | 0700037 | CF 560 OHM +–5% 1/16W | R617 | 0113688 | CF 3.3 OHM +–5% 1/2W |
| R505 | 0700038 | CF 680 OHM +–5% 1/16W | R618 | 0150109 | VR 200 OHM-B RS-6 |
| R506 | 0700061 | CF 33K OHM +–5% 1/16W | R619 | 0700026 | CF 82 OHM +–5% 1/16W |
| R508 | 0700065 | CF 68K OHM +–5% 1/16W | R620 | 0700054 | CF 10K OHM +–5% 1/16W |
| R509 | 0700065 | CF 68K OHM +–5% 1/16W | R624 | 0700046 | CF 2.7K OHM +–5% 1/16W |
| R510 | 0700041 | CF 1K OHM +–5% 1/16W | R629 | 0150110 | VR 500 OHM-B |
| R511 | 0179563 | MG 3.3M OHM +–5% 1/8W | R651 | 0700052 | CF 6.8K OHM +–5% 1/16W (2518/2718) |
| R512 | 0700048 | CF 3.9K OHM +–5% 1/16W | R651 | 0700049 | CF 4.7K OHM +–5% 1/16W (2918) |
| R513 | 0700043 | CF 1.5K OHM +–5% 1/16W | R652 | 0700065 | CF 68K OHM +–5% 1/16W |
| R514 | 0700053 | CF 8.2K OHM +–5% 1/16W | R654 | 0700036 | CF 470 OHM +–5% 1/16W (2518) |
| R515 | 0179536 | MG 1M OHM +–5% 1/8W | R654 | 0700032 | CF 220 OHM +–5% 1/16W (2718) |
| R516 | 0700056 | CF 15K OHM +–5% 1/16W | R655 | 0150284 | VR 2K OHM-B |
| R517 | 0700042 | CF 1.2K OHM +–5% 1/16W | R656 | 0700066 | CF 82K OHM +–5% 1/16W |
| R519 | 0700067 | CF 100K OHM +–5% 1/16W | R657 | 0150286 | VR 5K OHM B |
| R520 | 0700067 | CF 100K OHM +–5% 1/16W | R658 | 0700047 | CF 3.3K OHM +–5% 1/16W |
| R521 | 0700041 | CF 1K OHM +–5% 1/16W | R659 | 0700041 | CF 1K OHM +–5% 1/16W |
| R522 | 0700045 | CF 2.2K OHM +–5% 1/16W | R660 | 0100077 | CF 3.3K OHM +–5% 1/8W |
| R523 | 0700039 | CF 820 OHM +–5% 1/16W | R661 | 0100079 | CF 3.9K OHM +–5% 1/8W |
| R524 | 0700045 | CF 2.2K OHM +–5% 1/16W | R662 | 0700067 | CF 100K OHM +–5% 1/16W |
| R525 | 0700056 | CF 15K OHM +–5% 1/16W | R663 | 0100089 | CF 10K OHM +–5% 1/8W |
| R526 | 0700052 | CF 6.8K OHM +–5% 1/16W | R666 | 0700044 | CF 1.8K OHM +–5% 1/16W |
| ⚠ R527 | 0700041 | CF 1K OHM +–5% 1/16W | R667 | 0700063 | CF 47K OHM +–5% 1/16W (2518/2718) |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION | SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|---|---|---|
| R668 | 0700057 | CF 18K OHM +–5% 1/16W (2518/2718) | R738 | 0700032 | CF 220 OHM +–5% 1/16W |
| R669 | 0700058 | CF 22K OHM +–5% 1/16W (2518/2718) | R739 | 0700043 | CF 1.5K OHM +–5% 1/16W |
| R670 | 0700049 | CF 4.7K OHM +–5% 1/16W (2518/2718) | R743 | 0700055 | CF 12K OHM +–5% 1/16W |
| R671 | 0700054 | CF 10K OHM +–5% 1/16W | R744 | 0700048 | CF 3.9K OHM +–5% 1/16W (2518) |
| R672 | 0700051 | CF 5.6K OHM +–5% 1/16W | R744 | 0700051 | CF 5.6K OHM +–5% 1/16W (2718/2918) |
| R673 | 0700064 | CF 56K OHM +–5% 1/16W | R745 | 0113795 | CF 68K OHM +–5% 1/2W |
| R674 | 0700045 | CF 2.2K OHM +–5% 1/16W (2518) | R747 | 0100105 | CF 47K OHM +–5% 1/8W |
| R676 | 0700045 | CF 2.2K OHM +–5% 1/16W | R748 | 0119693 | MF 0.39 OHM +–5% 1W |
| R686 | 0700037 | CF 560 OHM +–5% 1/16W (2918) | R749 | 0700048 | CF 3.9K OHM +–5% 1/16W |
| R7001 | 0100049 | CF 220 OHM +–5% 1/8W | R750 | 0700052 | CF 6.8K OHM +–5% 1/16W |
| R7002 | 0100133 | CF 680K OHM +–5% 1/8W | R751 | 0700035 | CF 390 OHM +–5% 1/16W |
| R7003 | 0700045 | CF 2.2K OHM +–5% 1/16W | R752 | 0700048 | CF 3.9K OHM +–5% 1/16W |
| R7004 | 0700048 | CF 3.9K OHM +–5% 1/16W | R753 | 0700043 | CF 1.5K OHM +–5% 1/16W |
| R7005 | 0100121 | CF 220K OHM +–5% 1/8W | R754 | 0700044 | CF 1.8K OHM +–5% 1/16W |
| R7006 | 0700054 | CF 10K OHM +–5% 1/16W | R755 | 0700056 | CF 15K OHM +–5% 1/16W |
| R7007 | 0114161 | CF 1K OHM +–5% 1/4W | R756 | 0113721 | CF 68 OHM +–5% 1/2W |
| R7008 | 0114161 | CF 1K OHM +–5% 1/4W | R761 | 0114139 | CF 220 OHM +–5% 1/4W |
| R7009 | 0100069 | CF 1.5K OHM +–5% 1/8W | R763 | 0110229 | MF 220 OHM +–5% 2W |
| R7011 | 0700048 | CF 3.9K OHM +–5% 1/16W | R765 | 0100097 | CF 22K OHM +–5% 1/8W |
| R7012 | 0700048 | CF 3.9K OHM +–5% 1/16W | R772 | 0700058 | CF 22K OHM +–5% 1/16W |
| R7014 | 0179561 | MG 2.2M OHM +–5% 1/8W | R776 | 0700063 | CF 47K OHM +–5% 1/16W |
| R703 | 0110285 | MF 47K OHM +–5% 2W | R777 | 0113692 | CF 4.7 OHM +–5% 1/2W (2918) |
| R704 | 0100041 | CF 100 OHM +–5% 1/8W | R778 | 0113692 | CF 4.7 OHM +–5% 1/2W (2918) |
| R705 | 0100133 | CF 680K +–5% 1/8W | R779 | 0100103 | CF 39K OHM +–5% 1/8W (2918) |
| R706 | 0700051 | CF 5.6K OHM +–5% 1/16W | ⚠ R7910 | 0700039 | CF 820 OHM +–5% 1/16W |
| R708 | 0100129 | CF 470K OHM +–5% 1/8W | ⚠ R7911 | 0700051 | CF 5.6K OHM +–5% 1/16W |
| R710 | 0150291 | VR 100K OHM-B | R792 | 0700052 | CF 6.8K OHM +–5% 1/16W |
| R711 | 0700057 | CF 18K OHM +–5% 1/16W | R793 | 0700045 | CF 2.2K OHM +–5% 1/16W |
| R712 | 0100053 | CF 330 OHM +–5% 1/8W | R833 | 0113815 | CF 470K OHM +–5% 1/2W |
| R713 | 0700058 | CF 22K OHM +–5% 1/16W | R851 | 0110367 | MF 8.2K OHM +–5% 3W |
| R714 | 0700033 | CF 270 OHM +–5% 1/16W | R852 | 0110367 | MF 8.2K OHM +–5% 3W |
| R715 | 0700051 | CF 5.6K OHM +–5% 1/16W | R853 | 0110367 | MF 8.2K OHM +–5% 3W |
| R716 | 0700051 | CF 5.6K OHM +–5% 1/16W | R854 | 0113760 | CF 2.7K OHM +–5% 1/2W |
| R719 | 0700034 | CF 330 OHM +–5% 1/16W | R855 | 0113760 | CF 2.7K OHM +–5% 1/2W |
| R7230 | 0113705 | CF 15 OHM +–5% 1/2W | R856 | 0113760 | CF 2.7K OHM +–5% 1/2W |
| R7237 | 0100094 | CF 16K OHM +–5% 1/8W | R857 | 0100041 | CF 100 OHM +–5% 1/8W |
| R7238 | 0700056 | CF 15K OHM +–5% 1/16W | R858 | 0100041 | CF 100 OHM +–5% 1/8W |
| R7239 | 0700063 | CF 47K OHM +–5% 1/16W | R859 | 0100041 | CF 100 OHM +–5% 1/8W |
| R724 | 0113762 | CF 3.3K OHM +–5% 1/2W | R860 | 0150109 | VR 200 OHM-B RS-6 |
| R725 | 0110359 | MF 3.9K OHM +–5% 3W | R861 | 0100041 | CF 100 OHM +–5% 1/8W |
| R726 | 0110361 | MF 4.7K OHM +–5% 3W | R862 | 0100049 | CF 220 OHM +–5% 1/8W |
| R727 | 0119688 | MF 0.22 OHM +–5% 1W | R863 | 0100041 | CF 100 OHM +–5% 1/8W |
| R728 | 0700026 | CF 82 OHM +–5% 1/16W | R864 | 0150109 | VR 200 OHM-B RS-6 |
| R729 | 0114145 | CF 390 OHM +–5% 1/4W | R865 | 0100041 | CF 100 OHM +–5% 1/8W |
| R730 | 0700041 | CF 1K OHM +–5% 1/16W | R866 | 0150113 | VR 5K OHM-B RS-6 |
| R731 | 0700046 | CF 2.7K OHM +–5% 1/16W | R867 | 0100055 | CF 390 OHM +–5% 1/8W |
| R732 | 0700051 | CF 5.6K OHM +–5% 1/16W | R868 | 0150113 | VR 5K OHM-B RS-6 |
| R734 | 0700042 | CF 1.2K OHM +–5% 1/16W | R869 | 0100055 | CF 390 OHM +–5% 1/8W |
| R735 | 0700056 | CF 15K OHM +–5% 1/16W | R870 | 0150113 | VR 5K OHM-B RS-6 |
| R7352 | 0700061 | CF 33K OHM +–5% 1/16W | R871 | 0100055 | CF 390 OHM +–5% 1/8W |
| R736 | 0100103 | CF 39K OHM +–5% 1/8W | R872 | 0100041 | CF 100 OHM +–5% 1/8W |
| R737 | 0100115 | CF 120K OHM +–5% 1/8W | R873 | 0100041 | CF 100 OHM +–5% 1/8W |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| R874 | 0100041 | CF 100 OHM +–5% 1/8W |
| R875 | 0100041 | CF 100 OHM +–5% 1/8W |
| R876 | 0100057 | CF 470 OHM +–5% 1/8W |
| R877 | 0100041 | CF 100 OHM +–5% 1/8W |
| R878 | 0100057 | CF 470 OHM +–5% 1/8W |
| R879 | 0100041 | CF 100 OHM +–5% 1/8W |
| R880 | 0100057 | CF 470 OHM +–5% 1/8W |
| R881 | 0100043 | CF 120 OHM +–5% 1/8W |
| R883 | 0100105 | CF 47K OHM +–5% 1/8W |
| R884 | 0100105 | CF 47K OHM +–5% 1/8W |
| R885 | 0100105 | CF 47K OHM +–5% 1/8W |
| R886 | 0100043 | CF 120 OHM +–5% 1/8W |
| ⚠ R901A | 0141063 | WW 5 OHM +–5% 8W |
| ⚠ R901B | 0141063 | WW 5 OHM +–5% 8W |
| R907 | 0110217 | MF 68 OHM +–5% 2W |
| R909 | 0113754 | CF 1.5K OHM +–5% 1/2W |
| R910 | 0113803 | CF 150K OHM +–5% 1/2W |
| R911 | 0113801 | CF 120K OHM +–5% 1/2W |
| R913 | 0113801 | CF 120K OHM +–5% 1/2W |
| R915 | 0113803 | CF 150K OHM +–5% 1/2W |
| R916 | 0100001 | CF 2.2 OHM +–5% 1/8W |
| R017 | 0100001 | CF 2.2 OHM +–5% 1/8W |
| R918 | 0100001 | CF 2.2 OHM +–5% 1/8W |
| R919 | 0100001 | CF 2.2 OHM +–5% 1/8W |
| R920 | 0113754 | CF 1.5K OHM +–5% 1/2W |
| R921 | 0113754 | CF 1.5K OHM +–5% 1/2W |
| R922 | 0113754 | CF 1.5K OHM +–5% 1/2W |
| R923 | 0113754 | CF 1.5K OHM +–5% 1/2W |
| R924 | 0113754 | CF 1.5K OHM +–5% 1/2W |
| R925 | 0110245 | MF 1K OHM +–5% 2W |
| R926 | 0114059 | CF 56 OHM +–5% 1/4W |
| R927 | 0110229 | MF 220 OHM +–5% 2W |
| R929 | 0110229 | MF 220 OHM +–5% 2W |
| R930 | 0100089 | CF 10K OHM +–5% 1/8W |
| R931 | 0100089 | CF 10K OHM +–5% 1/8W |
| R932 | 0113754 | CF 1.5K OHM +–5% 1/2W |
| R933 | 0113754 | CF 1.5K OHM +–5% 1/2W |
| R937 | 0110121 | MF 100 OHM +–5% 1W |
| R938 | 0100069 | CF 1.5K OHM +–5% 1/8W |
| R939 | 0100045 | CF 150 OHM +–5% 1/8W |
| R940 | 0100091 | CF 12K OHM +–5% 1/8W |
| R941 | 0100073 | CF 2.2K OHM +–5%1/8W |
| R942 | 0100041 | CF 100 OHM +–5% 1/8W |
| R943 | 0100089 | CF 10K OHM +–5% 1/8W |
| R944 | 0100089 | CF 10K OHM +–5% 1/8W |
| R946 | 0100001 | CF 2.2 OHM +–5% 1/8W |
| R947 | 0100001 | CF 2.2 OHM +–5% 1/8W |
| R948 | 0100001 | CF 2.2 OHM +–5% 1/8W |
| R949 | 0100001 | CF 2.2 OHM +–5% 1/8W |
| R950 | 0110105 | MF 22 OHM +–5% 1W (2518) |
| R950A | 01103448 | MF 910 OHM +–5% 3W (2718/2918) |
| ⚠ R951 | 0119838 | FR 0.5 OHM +–5% 1/4W (2518) |
| ⚠ R951 | 0119838 | FR 0.5 OHM +–5% 1/4W |
| R956 | 0110325 | MF 150 OHM +–5% 3W |
| ⚠ R965 | 0119508 | FR 56 OHM +–5% 1/4W |
| ⚠ R966 | 0119508 | FR 56 OHM +–5% 1/4W |
| R967 | 0113795 | CF 68K OHM +–5% 1/2W |
| R968 | 0100081 | CF 4.7K OHM +–5% 1/8W |
| R969 | 0100065 | CF 1K OHM +–5% 1/8W |
| R971 | 0119622 | MF 4.3K OHM +–1% 1/8W |
| R972 | 0113795 | CF 68K OHM +–5% 1/2W |
| R973 | 0114161 | CF 1K OHM +–5% 1/4W |
| R975 | 0100087 | CF 8.2K OHM +–5% 1/8W |
| R976 | 0114223 | CF 82K OHM +–5% 1/4W |
| R977 | 0194068 | WW 1 OHM +–5% 2W |
| R978 | 0100065 | CF 1K OHM +–5% 1/8W |
| ⚠ R980 | 0141167 | WW 4.7 OHM +–10% 7W |
| R981 | 0100065 | CF 1K OHM +–5% 1/8W |
| R982 | 0100065 | CF 1K OHM +–5% 1/8W |
| R983 | 0114169 | CF 2.2K OHM +–5% 1/4W |
| R985 | 0100089 | CF 10K OHM +–5% 1/8W |
| R986 | 0100089 | CF 10K OHM +–5% 1/8W |
| R998 | 0179529 | MG 10M OHM +–5% 1/2W |
| VR951 | 0150151 | VR 500 OHM-B RV-6 |

**I C**

| | | |
|---|---|---|
| ⚠ IC1101 | 2001352 | IC M34300N4–657SP (MICON) |
| ⚠ IC1102 | 2366621 | IC LA7910 |
| ⚠ IC1103 | 2366621 | IC LA7910 |
| ⚠ IC1301 | 2914951 | IC HA11508 |
| ⚠ IC1302 | 2917611 | IC LA7016 |
| ⚠ IC1303 | 2917611 | IC LA7016 |
| ⚠ IC1304 | 2917611 | IC LA7016 |
| ⚠ IC1305 | 2917611 | IC LA7016 |
| ⚠ IC1306 | 2917611 | IC LA7016 |
| ⚠ IC1307 | 2917611 | IC LA7016 |
| ⚠ IC251 | 2916682 | IC LA7550H |
| ⚠ IC3201 | 2381832 | IC HA11559NT |
| ⚠ IC3501 | 2912961 | IC M51386L |
| ⚠ IC4001 | 2366392 | IC AN5836 |
| ⚠ IC4501 | 2916321 | IC LA4280 |
| ⚠ IC5001 | 2914741 | IC AN5635N–A |
| ⚠ IC501 | 2914733 | IC HA51339SP–3 |
| ⚠ IC502 | 2917611 | IC LA7016 |
| ⚠ IC601 | 2917361 | IC UPC1498H |
| ⚠ IC651 | 2380651 | IC AN5551 |
| ⚠ IC7000 | 2370971 | IC LA7950 |
| ⚠ IC901 | 2913101 | IC TDA4601 |
| ⚠ IC902 | 2917781 | IC CNX82A |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| **TRANSISTORS** | | |
| Q1101 | 2320595 | TR 2SC458 (D) |
| Q1102 | 2009401R | IC PST529C |
| Q1103 | 2326872 | TR DTC114ES |
| Q1104 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1105 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1106 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1107 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1110 | 2327773 | TR 2SC3413 (C)/(D) (2918) |
| Q1111 | 2327773 | TR2SC3413 (C)/(D) |
| Q1112 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1113 | 2326871 | TR DTC124ES |
| Q1114 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1115 | 2326871 | TR DTC124ES |
| Q1116 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1117 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1118 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1301 | 2320643 | TR 2SC1213C |
| Q1310 | 2326875 | TR DTC144WSTP |
| Q1311 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1312 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1313 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1314 | 2320635 | TR 2SA673D |
| Q1315 | 2327773 | TR 2SC3413 (C)/(D) |
| Q1316 | 2327773 | TR 2SC3413 (C)/(D) |
| Q201 | 2326875 | TR DTC144WSTP |
| Q251 | 2326873 | TR DTC144ES |
| Q252 | 2326873 | TR DTC144ES |
| Q253 | 2326873 | TR DTC144ES |
| Q254 | 2327752 | TR 2SA1390 (B)/(C) |
| Q255 | 2327773 | TR 2SC3413 (C)/(D) |
| Q256 | 2326872 | TR DTC114ES |
| Q257 | 2327772 | TR 2SC3413 (B)/(C) |
| Q258 | 2326872 | TR DTC114ES |
| Q301 | 2327773 | TR 2SC3413 (C)/(D) |
| Q302 | 2327773 | TR 2SC3413 (C)/(D) |
| Q303 | 2326875 | TR DTC144WSTP |
| Q304 | 2326875 | TR DTC144WSTP |
| Q311 | 2320595 | TR 2SC458 (D) |
| Q313 | 2320635 | TR 2SA673D |
| Q314 | 2320595 | TR 2SC458 (D) |
| Q315 | 2320635 | TR 2SA673D |
| Q316 | 2320635 | TR 2SA673D |
| Q317 | 2320635 | TR 2SA673D |
| Q3201 | 2324611 | TR 2SD882 (Q)/(P) |
| Q3202 | 2327773 | TR 2SC3413 (C)/(D) |
| Q3203 | 2327773 | TR 2SC3413 (C)/(D) |
| Q3204 | 2327773 | TR 2SC3413 (C)/(D) |
| Q3205 | 2327752 | TR 2SA1390 (B)/(C) |
| Q3209 | 2326875 | TR DTC144WSTP |
| Q4001 | 2320643 | TR 2SC1213C |
| Q401 | 2327773 | TR 2SC3413 (C)/(D) |
| Q4401 | 2327773 | TR 2SC3413 (C)/(D) (2918) |
| Q4402 | 2327773 | TR 2SC3413 (C)/(D) (2918) |
| Q4403 | 2327773 | TR 2SC3413 (C)/(D) (2918) |
| Q4404 | 2327773 | TR 2SC3413 (C)/(D) (2918) |
| R4405 | 2327773 | TR 2SC3413 (C)/(D) (2918) |
| Q441 | 2327773 | TR 2SC3413 (C)/(D) |
| Q442 | 2327773 | TR 2SC3413 (C)/(D) |
| Q4501 | 2320637 | TR 2SA673 (C)/(D) |
| Q4502 | 2327772 | TR 2SC3413 (B)/(C) |
| Q451 | 2312941M | TR 2SC3413BC/1740S–QRTA |
| Q451 | 2324733 | TR 2SC3399 |
| Q452 | 2312941M | TR 2SC3413BC/1740S–QRTA |
| Q452 | 2324733 | TR 2SC3399 |
| Q453 | 2312941M | TR 2SC3413BC/1740S–QRTA |
| Q454 | 2312941M | TR 2SC3413BC/1740S–QRTA |
| Q471 | 2327773 | TR 2SC3413 (C)/(D) |
| Q472 | 2326873 | TR DTC144ES |
| Q473 | 2326873 | TR DTC144ES |
| Q481 | 2327773 | TR 2SC3413 (C)/(D) |
| Q482 | 2327773 | TR 2SC3413 (C)/(D) |
| Q5001 | 2320637 | TR 2SA673 (C)/(D) |
| Q5002 | 2320595 | TR 2SC458 (D) |
| Q5003 | 2320595 | TR 2SC458 (D) |
| Q5004 | 2324734 | TR 2SC3401 |
| Q501 | 2326875 | TR DTC144WSTP |
| Q502 | 2326875 | TR DTC144WSTP |
| Q503 | 2327773 | TR 2SC3413 (C)/(D) |
| Q504 | 2326875 | TR DTC144WSTP |
| Q505 | 2326875 | TR DTC144WSTP |
| Q506 | 2326875 | TR DTC144WSTP |
| Q507 | 2327773 | TR 2SC3413 (C)/(D) |
| Q508 | 2327773 | TR 2SC3413 (C)/(D) |
| Q509 | 2327773 | TR 2SC3413 (C)/(D) |
| Q510 | 2327773 | TR 2SC3413 (C)/(D) |
| Q6010 | 2326872 | TR DTC114ES |
| Q6011 | 2326872 | TR DTC114ES |
| Q651 | 2323432 | TR 2SC1983 R/O/Y |
| Q657 | 2327753 | TR 2SA1390 (C)/(D) |
| Q7000 | 2320595 | TR 2SC458 (D) |
| Q7001 | 2326872 | TR DTC114ES |
| Q7011 | 2326872 | TR DTC114ES |
| Q7012 | 2326872 | TR DTC114ES |
| Q704 | 2326216 | TR 2SC3116 S/T |
| Q705 | 2327844 | TR 2SD1959–02 |
| Q707 | 2320681 | TR 2SA673A B/C |
| Q708 | 2321112 | TR 2SA778A |
| ⚠ Q709 | 2325721 | TR 2SC1740S |
| Q710 | 2325702 | TR 2SA854S Q/R |
| Q730 | 2327773 | TR 2SC3413 (C)/(D) |
| Q731 | 2327773 | TR 2SC3413 (C)/(D) |
| ⚠ Q7902 | 2390022 | THYRISTOR SLICON M21C (Y) |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| Q791 | 2327772 | TR 2SC3413 (B)/(C) |
| ⚠ Q851 | 2321221 | TR 2SC1514 |
| ⚠ Q852 | 2327772 | TR 2SC3413 (B)/(C) |
| Q853 | 2324322 | TR 2SC2271/2SC2610–05 |
| ⚠ Q854 | 2321221 | TR 2SC1514 |
| Q855 | 2327772 | TR 2SC3413 (B)/(C) |
| Q856 | 2324322 | TR 2SC2271/2SC2610–05 |
| ⚠ Q857 | 2321221 | TR 2SC1514 |
| Q858 | 2327772 | TR 2SC3413 (B)/(C) |
| ⚠ Q859 | 2324322 | TR 2SC2271/2SC2610–05 |
| ⚠ Q901 | 2327844 | TR 2SD1959–02 |
| Q902 | 2325951R | TR BC548B |
| Q903 | 2325961R | TR BC558B |
| Q904 | 2321591 | TR 2SD401A (K) |
| Q906 | 2326631 | THYRISTOR CR5AS–8 |
| Q951 | 2312171 | TR 2SC3852 |
| Q952 | 2320663 | TR 2SC1213AC |
| Q953 | 2325961R | TR BC558B |
| Q954 | 2325961R | TR BC558B |
| Q955 | 2327773 | TR 2SC3413 (C)/(D) |

## DIODES

| | | |
|---|---|---|
| D1101 | 23383211 | DI 1SS270 |
| D1106 | 23383211 | DI 1SS270 |
| D1107 | 23383211 | DI 1SS270 |
| D1108 | 23383211 | DI 1SS270 |
| D1109 | 23383211 | DI 1SS270 |
| D1110 | 23383211 | DI 1SS270 |
| D1111 | 23383211 | DI 1SS270 |
| D1112 | 23383211 | DI 1SS270 |
| D1113 | 23383211 | DI 1SS270 |
| D1114 | 23383211 | DI 1SS270 |
| D1115 | 23383211 | DI 1SS270 |
| D1116 | 23383211 | DI 1SS270 (2518/2918) |
| D1117 | 23383211 | DI 1SS270 |
| D1118 | 23383211 | DI 1SS270 |
| D1120 | 2339691 | LED SLH–56VC77F |
| D1121 | 23383211 | DI 1SS270 |
| D1122 | 23383211 | DI 1SS270 |
| D1125 | 23383211 | DI 1SS270 (2718/2918) |
| D1126 | 23383211 | DI 1SS270 |
| D1127 | 23383211 | DI 1SS270 |
| D1130 | 23383211 | DI 1SS270 |
| D1132 | 23383211 | DI 1SS270 |
| D1133 | 23383211 | DI 1SS270 |
| D1134 | 23383211 | DI 1SS270 |
| D1135 | 23383211 | DI 1SS270 |
| D1136 | 23383211 | DI 1SS270 |
| D1137 | 23383211 | DI 1SS270 |
| D1138 | 23383211 | DI 1SS270 |
| D1139 | 23383211 | DI 1SS270 |
| D1143 | 23383211 | DI 1SS270 |
| D1144 | 2330351 | DI 1SS270 (2718/2918) |
| D1304 | 23383211 | DI 1SS270 |
| D201 | 23383211 | DI 1SS270 |
| D202 | 23383211 | DI 1SS270 |
| D251 | 23383211 | DI 1SS270 |
| D252 | 23383211 | DI 1SS270 |
| D253 | 23383211 | DI 1SS270 |
| D254 | 23383211 | DI 1SS270 |
| D301 | 23383211 | DI 1SS270 |
| D303 | 23383211 | DI 1SS270 |
| D304 | 23383211 | DI 1SS270 |
| D306 | 23383211 | DI 1SS270 |
| D3201 | 23383211 | DI 1SS270 |
| D3202 | 23383211 | DI 1SS270 |
| D3203 | 23383211 | DI 1SS270 |
| D3805 | 23383211 | DI 1SS270 |
| D441 | 23383211 | DI 1SS270 |
| D442 | 23383211 | DI 1SS270 |
| D4501 | 23394911 | DI AM01Z |
| D5001 | 2330351 | DI 1S2076 |
| D5002 | 2330351 | DI 1S2076 |
| D501 | 23383211 | DI 1SS270 |
| D502 | 23383211 | DI 1SS270 |
| D503 | 23383211 | DI 1SS270 |
| D601 | 23383211 | DI 1SS270 |
| D6012 | 23383211 | DI 1SS270 |
| D602 | 23373411 | DI 1SS270A |
| D603 | 23394911 | DI AM01Z |
| D605 | 23383211 | DI 1SS270 |
| D606 | 23383211 | DI 1SS270 |
| D607 | 23383211 | DI 1SS270 |
| D651 | 23383211 | DI 1SS270 |
| D652 | 23394911 | DI AM01Z |
| D653 | 23383211 | DI 1SS270 (2918) |
| D654 | 23383211 | DI 1SS270 (2918) |
| D655 | 23383211 | DI 1SS270 (2918) |
| D656 | 23383211 | DI 1SS270 (2918) |
| D7001 | 23383211 | DI 1SS270 |
| D7002 | 23383211 | DI 1SS270 |
| D7003 | 23383211 | DI 1SS270 |
| D701 | 23383211 | DI 1SS270 |
| D7011 | 23383211 | DI 1SS270 |
| D702 | 23383211 | DI 1SS270 |
| D703 | 2344071 | DI ERC20M–04 |
| D704 | 2338902 | DI DFM1SA4 |
| D705 | 23394811 | DI AS01Z |
| D707 | 2338902 | DI DFM1SA4 |
| D708 | 2398611 | DI 1SS254 |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| D709 | 23383211 | DI 1SS270 |
| D711 | 2338902 | DI DFM1SA4 |
| D712 | 23394811 | DI AS01Z |
| D713 | 23383211 | DI 1SS270 |
| D716 | 2338902 | DI DFM1SA4 (2918) |
| D7202 | 2343981 | DI ERD07–15 |
| D851 | 23383211 | DI 1SS270 |
| D852 | 23383211 | DI 1SS270 |
| D853 | 23383211 | DI 1SS270 |
| D901 | 2338314 | DI RBV–406M LF–A |
| D902 | 23394811 | DI AS01Z |
| D903 | 23394811 | DI AS01Z |
| D904 | 23394811 | DI AS01Z |
| D905 | 2333001 | DI RU2M |
| D907 | 23394811 | DI AS01Z |
| D912 | 23394811 | DI AS01Z |
| D950 | 23389311 | DI FMG–G26S |
| D951 | 23394811 | DI AS01Z (2518) |
| D952 | 2338944 | DI FML–G12S (F) |
| D953 | 2338944 | DI FML–G12S (F) |
| D954 | 2336501 | DI 1N4148 |
| D955 | 23394811 | DI AS01Z |
| D957 | 23394811 | DI AS01Z |
| ZD1101 | 2339852 | ZD HZS7–A2 |
| ZD1102 | 2339858M | ZD HZS7–C2 |
| ZD1103 | 2335991 | ZD HZT–33 |
| ZD1104 | 2339829 | DIODE–ZENER HZS4C3 (2518) |
| ZD1105 | 2339852 | ZD HZS7–A2 |
| ZD1106 | 2339852 | ZD HZS7–A2 |
| ZD1107 | 2339872 | ZD HZS11A2 (2718/2918) |
| ZD1301 | 2339151 | ZD HZS12C1L TA |
| ZD1302 | 2339151 | ZD HZS12C1L TA |
| ZD301 | 2331849 | ZD HZ–12 (C3) |
| ZD302 | 2331849 | ZD HZ–12 (C3) |
| ZD303 | 2331849 | ZD HZ–12 (C3) |
| ZD3201 | 2339846M | ZD HZS6B3TA |
| ZD3202 | 2339825 | ZD HZS4B2 |
| ZD4001 | 2331155 | ZD HZ–12 (C1/C2/C3) |
| ZD4002 | 2331155 | ZD HZ–12 (C1/C2/C3) |
| ZD4508 | 2331845 | ZD HZ–12 (B2) |
| ZD4509 | 2331845 | ZD HZ–12 (B2) |
| ZD4510 | 2331842 | ZD HZ–12 (A2) |
| ZD5001 | 2331155 | ZD HZ–12 (C1/C2/C3) |
| ZD 601 | 2339151 | ZD HZS12C1L TA |
| ZD602 | 2339825 | ZD HZS4B2 |
| ZD6201 | 2339868M | ZD HZS9C2TA |
| ZD651 | 2339846M | ZD HZS6B3TA (2718) |
| ZD652 | 2331834 | ZD HZ–11 B1 (2518) |
| ZD7001 | 2339828 | ZD HZS4C2 |
| ZD703 | 2339212M | ZD HZS24–2L TA |
| ZD704 | 2339848 | ZD HZS–6–C2 |
| ⚠ ZD708 | 2339801 | ZD HZS2B1 |
| ZD709 | 2339889 | ZD HZS12C3 |
| ZD901 | 2334022 | ZD RD2.0EB |
| ZD902 | 2334243 | ZD RD16E (B2) |
| ZD903 | 2334052 | ZD RD2.7EB1 |
| ZD904 | 2331844 | ZD HZ12 (B) 1 |
| ZD905 | 2331842 | ZD HZ–12 (A2) |
| ZD930 | 2331155 | ZD HZ–12 (C1/C2/C3) |
| ZD951 | 2331846 | ZD HZ–12 (B) 3 |
| ZD952 | 2334153 | ZD RD6.8EB2 |
| ZD953 | 2331799 | ZD HZ–5 (C) 3 |

## TRANSFORMERS

| | | |
|---|---|---|
| T5001 | 2143563 | BEL FILTER TRANSFORMER |
| T501 | 2143341 | 7PL COIL |
| T701 | 2260291 | HOLIZONTAL DRIVE TRANSFORMER |
| ⚠ T702 | 2435373 | FLYBACK TRANSFORMER |
| T703 | 2272761 | OVER SATURARION TRANSFORMER |
| ⚠ T901 | 2215581 | POWER TRANSFORMER |

## FUSES

| | | |
|---|---|---|
| ⚠ F901 | 2720404 | FUSE T4.0A |
| ⚠ F950 | 2721704 | DUSE 2A |

## COMPOUND COMPONENTS

| | | |
|---|---|---|
| ⚠ CP001 | 2786831 | PRE–AMP. |
| CP050 | 2150201 | TRAP COIL |
| CP051 | 2114327 | TRAP COIL |
| ⚠ CP1101 | 2381123 | REMOTE CONTROL RECEIVER SPS–409–1C |
| CP1102 | 2791754R | EMI FILTER 100PF |
| CP1103 | 2791754R | EMI FILTER 100PF |
| CP1104 | 2791754R | EMI FILTER 100PF |
| CP1105 | 2791754R | EMI FILTER 100PF |
| CP1106 | 2791754R | EMI FILTER 100PF |
| CP1107 | 2791754R | EMI FILTER 100PF |
| CP1108 | 2791754R | EMI FILTER 100PF |
| ⚠ CP201 | 2300345 | SAW FILTER HW3025 |
| CP202 | 2142243 | CERAMIC TRAP |
| CP203 | 2143473 | TRAP COIL |
| CP204 | 2142241 | CERAMIC FILTER 4.5MHz |
| CP220 | 2142331 | CERAMIC TRAP 4.5MHz |
| CP221 | 2142331 | CERAMIC TRAP 4.5MHz |
| CP301 | 2143891 | LC FILTER |
| CP3201 | 2163971 | CERAMIC FILTER |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| MF441 | 2142601 | CERAMIC FILTER 4.5MHz |
| MF442 | 2142603 | CERAMIC FILTER 6.0MB |
| MF451 | 2143571 | CERAMIC DISC |
| MF452 | 2143572 | 6.0M CERAMIC DISCRIMINETER |
| MF471 | 2142602 | CERAMIC FILTER |
| MF472 | 2142603 | CERAMIC FILTER 6.0MB |
| MF473 | 2142604 | CERAMIC FILTER 6.5MB |
| **COILS** | | |
| L1101 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L1102 | 2122929 | LAL AXIAL COIL |
| L1103 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L1104 | 2123755 | RADIAL COIL |
| L1301 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L1303 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L1304 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L1308 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L206 | 2122253 | LA AXIAL COIL 100 MICRO H |
| L251 | 2122921 | LA AXIAL COIL |
| L252 | 2142023 | TRAP COIL |
| L253 | 2122941 | LA AXIAL COIL |
| L254 | 2122943 | LA AXIAL COIL 10 MICRO H ±10% |
| L255 | 2122941 | LA AXIAL COIL |
| L256 | 2143601 | FILTER COIL |
| L257 | 2143811 | HIGH FREQUENCY COIL |
| L258 | 2122234 | LA AXIAL COIL |
| L301 | 2122253 | LA AXIAL COIL 100 MICRO H |
| L302 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L304 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L3201 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L3202 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L3501 | 2122953 | LA AXIAL COIL 56 MICRO H |
| L3502 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L3503 | 2145201 | COIL |
| L3804 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L4001 | 2122253 | LA AXIAL COIL 100 MICRO H (2518) |
| L441 | 2122949 | LA AXIAL COIL 33 MICRO H ±10% |
| L451 | 2122947 | LA AXIAL COIL 22 MICRO H ±10% |
| L5001 | 2160831 | SETTLE COIL |
| L5002 | 2143561 | DISCRI COIL |
| L5003 | 2122945 | LA AXIAL COIL 15 MICRO H ±10% |
| L5004 | 2143561 | DISCRI COIL |
| L5005 | 2143561 | DISCRI COIL |
| L5006 | 2122945 | LA AXIAL COIL 15 MICRO H ±10% |
| L501 | 2122944 | LA AXIAL COIL 12 MICRO H |
| L502 | 2122944 | LA AXIAL COIL 12 MICRO H |
| L503 | 2122943 | LA AXIAL COIL 10 MICRO H ±10% |
| L504 | 2122942 | LA AXIAL COIL 8.2 MICRO H ±10% |
| L507 | 2143621 | PHASE COIL |
| L508 | 2123291M | LAL AXIAL COIL |
| L7001 | 2122956 | LA AXIAL COIL 100 MICRO H ±10% |
| L702 | 2220511 | TUNING COIL |
| L703 | 2220513 | COIL 0.01H |
| L704 | 2165761 | LINE COIL |
| L705 | 2220584 | CHOKE COIL TSL0707330K |
| L706 | 2220583 | COIL |
| L707 | 2220583 | COIL |
| L708 | 2122094 | FIXED COIL |
| L709 | 2120486 | FILTER COIL 4700 MICRO H |
| L712 | 2120482 | FILTER COIL 100 MICRO H ±10% |
| L713 | 2123469M | FERRITE BEADS CORE READ 2.3 |
| L714 | 2771892 | FERRITE BEADS CORE 004 |
| L715 | 2771892 | FERRITE BEADS CORE 004 |
| L717 | 2123461 | FERRITE BEADS CORE (2518/2718) |
| L901 | 2123504 | LINE FILTER |
| L905 | 2164788 | DEGAUSSING COIL (2518) |
| L905 | 2166021 | DEGAUSSING COIL (2718) |
| L905 | 2166212 | DEGAUSSING COIL (2918) |
| L906 | 2123781 | FILTER COIL |
| L907 | 2123781 | FILTER COIL |
| L927 | 2122095 | FILTER COIL 27 MICRO H (2718/2918) |
| **SWITCHS** | | |
| S1101 | 2633401 | PUSH SWITCH |
| S1102 | 2633171 | 5 KEY TACT SWITCH 5P |
| ⚠ S901 | 2632509 | PUSH SWITCH |
| **MISCELLANEOUS** | | |
| | 2663822 | 3P SUB MINI PLUG PIN |
| | 2665272 | 4P PLUG PIN WITH BASE |
| | 3754041 | PCB HOLDER |
| | 3761011 | PWB HOLDER F |
| | 4520881 | M3x8 SCREW WITH WASHER |
| | 4236051 | HEAT SINK |
| | 4519506 | 3x8 B TIGHT TAPPING SCREW |
| | 4520883 | M3x12 SCREW WITH WASHER |
| | 4520883 | M3x12 SCREW WITH WASHER |
| | 8821114 | NUT 3 |
| | 3742921 | PLASTIC RIVET |
| | 8815126 | LOCKING WASHER 4 |
| | 8813126 | 4 SPRING WASHER |
| | 4159423 | M3x12 SCREW W/WASHER |
| | 4159412 | 3x12 TAPPING SCREW |
| | 8813124 | WASHER |
| | 3763752 | SK BINDER |
| | 4519511 | 4x12 TAPPING SCREW |
| | 4519512 | TAPPING SCREW 4x16 MM |
| | 2663829 | 7P MINI–PLUG PIN |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|
| DL301 | 2793282 | DELAY LINE |
| DL3501 | 2791101 | DERAY LINE |
| DL501 | 2791155 | DERAY LINE |
| E | 2773671 | CF MAGNET |
| ⚠ E | 2953341 | CRT SOCKET |
| E1 | 2786224 | CPT EARTH WIRE |
| E4002 | 2663132 | 3P PLUG PIN WITH BASE |
| E4003 | 2661753 | PIN PLUG WITH BASE |
| ⚠ E903 | 2744301 | POWER CORD |
| E911 | 2720221 | FUSE HOLDER |
| E912 | 2661756 | 1P PLUG PIN WITH BASE |
| E921 | 4520881 | M3x8 SCREW WITH WASHER |
| E923 | 4520881 | M3x8 SCREW WITH WASHER |
| E930 | 3720501 | LEAD CLAMP |
| E940 | 2661756 | 1P PLUG PIN WITH BASE |
| E946 | 2663132 | 3P PLUG PIN WITH BASE |
| E951 | 2661753 | PIN PLUG WITH BASE |
| E956 | 2661753 | PIN PLUG WITH BASE |
| E957 | 2661753 | PIN PLUG WITH BASE |
| FB1101 | 2774651 | FERRITE BEADS CORE |
| FB251 | 2123461 | FERRITE BEADS CORE |
| FB301 | 2123461 | FERRITE BEADS CORE |
| FB302 | 2123461 | FERRITE BEADS CORE |
| FB303 | 2123461 | FERRITE BEADS CORE |
| FB501 | 2774631 | FERRITE BEADS CORE |
| FB901 | 2123464 | FERRITE BEADS CORE |
| FB901A | 2771892 | FERRITE BEADS CORE 004 |
| FB901B | 2771892 | FERRITE BEADS CORE 004 |
| FB901C | 2771892 | FERRITE BEADS CORE 004 |
| FB950 | 2123462 | FERRITE BEADS CORE |
| FB952 | 2123462 | FERRITE BEADS CORE |
| FB953 | 2123462 | FERRITE BEADS CORE |
| FB954 | 2123462 | FERRITE BEADS CORE |
| FB956 | 2123462 | FERRITE BEADS CORE |
| JA1301 | 2983082 | 0P PINJACK WITH S TERMINAL |
| JA1302 | 2983095 | 8P PIN JACK WITH SW |
| JA1303 | 2673001 | 3P PIN JACK |
| N | 4520881 | M3x8 SCREW WITH WASHER |
| P1P1 | 2661756 | 1P PLUG PIN WITH BASE |
| P2L | 2663823 | 4P PLUG PIN |
| P2R | 2663825 | 6P MINI—PLUG PIN |
| SG851 | 2340037 | SPARK GAP |
| SG852 | 2340037 | SPARK GAP |
| ⚠ SP401 | 2413301 | SPEAKER 10M |
| ⚠ SP402 | 2413311 | SPEAKER 4x6D (TWEETER) |
| ⚠ SP403 | 2413301 | SPEAKER 10M |
| ⚠ SP404 | 2413311 | SPEAKER 4x6D (TWEETER) |
| ⚠ TH901 | 2340542 | TH 160Y |
| ⚠ U001 | 2428332 | TUNER ET-575S |
| ⚠ U1001 | 2970507 | REMOTE CONTROL TRANSMITTER CLE-866E |
| ⚠ V1 | 2358323 | COLOR PICTURE TUBE A59JVQ60X (C) ENG |
| W916 | 3763752 | SK BINDER |
| X1101 | 2165081 | CERAMIC OSCILLATER |
| X481 | 2166041 | CERAMIC FILTER 512KHz |
| X501 | 2787572 | CRYSTAL |
| X502 | 27885911 | CRYSTAL |
| X701 | 2786683 | CERAMIC OSCILLATOR |

## MISCELLANEOUS (2518)

| | | |
|---|---|---|
| | 4518376 | SCREW |
| | 4520232 | 4x16 DT SCREW |
| | 3716271 | HADEL (R) 29 |
| | 3816272 | HANDLE (L) 29 |
| | 4519512 | TAPPING SCREW 4x16 MM |
| | 4519512 | TAPPING SCREW 4x16 MM |
| | 3825881 | TRIM (REAR COVER) |
| | 4518772 | 3x12 TNE |
| | 4519501 | 3x10 B—TIGHT TAPPING SCREW |
| | 4519511 | 4x12 TAPPING SCREW |
| | 8811114 | 3 SPRING WASHER |
| | 3871124 | SPEAKER HOLDER SASS R |
| | 4309801 | SPEAKER NET (B) |
| | 4519501 | 3x10 B—TIGHT TAPPING SCREW |
| | 3871125 | SPEAKER HOLDER SASS L |
| | 4309801 | SPEAKER NET (B) |
| | 8711616 | SCREW M4x16 |
| | 8811116 | WASHER M4 |
| | 8821116 | M4 NUT |
| | 8813126 | 4 SPRING WASHER |
| | 3102677 | FRAME ASS'Y |
| | 4519512 | TAPPING SCREW 4x16 MM |
| | 3815071 | POWER KNOB |
| | 3332453 | SPRING FOR KNOB |
| | 4159421 | 3x8 TAPPING SCREW |
| | 3814906 | CONTROL DOOR |
| | 3785043 | PUSH LOCK A |
| | 4137975 | 4x16 ZA R SCREW |
| | 4309791 | SPEAKER NET (A) |
| | 3162394 | REAR COVER ASS'Y |
| | 3761812 | CORD HOLDER |
| | 3727972 | HOLDER—AC LINE CORD |
| | 3742921 | PLASTIC RIVET |
| DY | 2443061 | DEFLECTION YOKE |
| FB951 | 2123462 | FERRITE BEADS CORE |
| N | 4615641 | WEDGE |
| DL501 | 2791155 | DERAY LINE (2518) |

**PRODUCT SAFETY NOTE:** Components marked with a ⚠ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

| SYMBOL NO. | PART NO. | DESCRIPTION | SYMBOL NO. | PART NO. | DESCRIPTION |
|---|---|---|---|---|---|
| | | MISCELLANEOUS (2718/2918) | | | |
| | 3401143 | PWB ASS'Y POWER SUPPLY SOUND BLOCK | | | |
| | 3871171 | ANTENNA HOLDER | | | |
| | 3162821 | REAR COVER ASS'Y | | | |
| | 3825881 | TRIM (REAR COVER) | | | |
| | 3761812 | CORD HOLDER | | | |
| | 3727972 | HOLDER–AC LINE CORD | | | |
| | 3742921 | PLASTIC RIVET | | | |
| | 4518376 | SCREW | | | |
| | 4520232 | 4 x 16 DT SCREW | | | |
| | 3103161 | FRAME ASS'Y | | | |
| | 4519512 | TAPPING SCREW 4 x 16 MM | | | |
| | 3815071 | POWER KNOB | | | |
| | 3332453 | SPRING FOR KNOB | | | |
| | 4159421 | 3 x 8 TAPPING SCREW | | | |
| | 3814906 | CONTROL DOOR | | | |
| | 3785043 | PUSH LOCK A | | | |
| | 4137975 | 4 x 16 ZA R SCREW | | | |
| | 4309791 | SPEAKER NET (A) | | | |
| | 3816275 | HANDLE (R) | | | |
| | 3816276 | HANDLE (L) | | | |
| | 3871121 | SPEAKER HOLDER R S–ASS'Y | | | |
| | 4309801 | SPEAKER NET (B) | | | |
| | 4519501 | 3 x 10 B–TIGHT TAPPING SCREW | | | |
| | 4519511 | 4 x 12 TAPPING SCREW | | | |
| | 3871122 | SPEAKER HOLDER L S–ASS'Y | | | |
| | 4309801 | SPEAKER NET (B) | | | |
| | 4519501 | 3 x 10 B–TIGHT TAPPING SCREW | | | |
| | 4519511 | 4 x 12 TAPPING SCREW | | | |
| | 8711616 | SCREW M4 x 16 (2718) | | | |
| | 8811116 | WASHER M4 | | | |
| | 8813126 | 4 SPRING WASHER | | | |
| | 8711616 | SCREW M4 x 16 (2918) | | | |
| | 4519511 | 4 x 12 TAPPING SCREW | | | |
| | 4519512 | TAPPING SCREW 4 x 16 MM | | | |
| | 4519412 | 3 x 12 TAPPING SCREW (2918) | | | |
| | 4159412 | 3 x 12 TAPPING SCREW (2718) | | | |
| | 2663829 | 7P MINI–PLUG PIN | | | |
| E004 | 2982291 | ANTENNA ADAPTOR | | | |
| E006 | 2669221 | COUPLER | | | |
| E008 | 2905241 | ANTENNA ADAPTOR | | | |
| E901 | 3763751 | SK BINDER | | | |
| E1 | 2771831 | C–F MAGNET (2918) | | | |
| E902 | 3333922 | EARTH SPRING (2918) | | | |
| E903 | 2744305 | POWER CORD | | | |
| E903 | 2994512 | CRT EARTH READ | | | |
| U701 | 2442982 | DEFLECTION YOKE–C110–27EA (2718) | | | |
| U701 | 2443261 | DEFLECTION YOKE (2918) | | | |
| Z901 | 3772201 | AC CORD HOLDER | | | |